

PierLUX PLUS

Simple, stylish and an economical system that has a super low profile.

Specification

- Shallow profile, available in three sizes
- White trim, frosted polycarbonate diffuser slightly bevelled back from the ceiling line with a beam 90 degree distribution, die-cast aluminium housing
- Available in 3000K and 4000K offering a CRI of >80, come complete with flex & plug
- The 15W format, OD 175mm, depth 70mm, Ø150mm
- The 20W format, OD 195mm, depth 78mm, Ø170mm
- The 30W format, OD 230mm, depth 86mm, Ø200mm
- Remote constant current driver to suit each format
- Non dimmable
- Average life: 35,000 hours
- Square and Round drop frosted glass accessories also available, ordered separately

Product Codes

Code	Version	Dim (mm)	Mass (kg)
PIERLUX/5/3K	15W 3K Fixed WH Trim 1105Lm	175 x 70	0.7
PIERLUX/5/4K	15W 4K Fixed WH Trim 1135Lm	175 x 70	0.7
PIERLUX/6/3K	20W 3K Fixed WH Trim 1390Lm	195 x 78	1.2
PIERLUX/6/4K	20W 4K Fixed WH Trim 1460Lm	195 x 78	1.2
PIERLUX/8/3K	30W 3K Fixed WH Trim 2025Lm	230 x 86	1.3
PIERLUX/8/4K	30W 4K Fixed WH Trim 2295Lm	230 x 86	1.3

Accessories

PIERRDG5/WH	Round WH 15W	0.1
PIERSDG5/WH	Square WH 15W	0.1
PIERRDG6/WH	Round WH 20W	0.1
PIERSDG6/WH	Square WH 20W	0.1
PIERRDG8/WH	Round WH 30W	0.1
PIERSDG8/WH	Square WH 30W	0.1



Quick Specification


Pierlite PierLUX PLUS, a series made up of three sizes wattages of 15W, 20W and 30W. Latest in LED technology

Design Application

Ideal for hotel, retail spaces, public areas, health sector, commercial environments, re-trofit installations

Performance

Polar intensity diagram

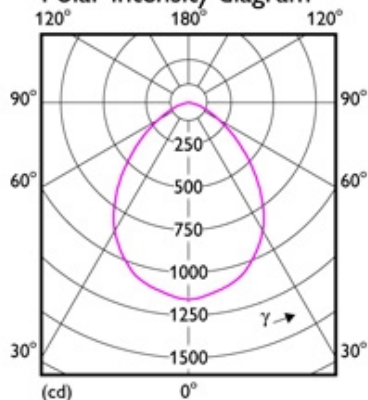

PIERLUX PLUS 30W 4000K 90° 1 x 5630 SMD / 4000

1 x 2194 lm

Light output ratio	1.00
Service upward	0.00
Service downward	1.00

I_{max} 1156 cd

BS ($\frac{1}{2}I_{max}$) 2 x 43°
BS ($\frac{1}{2}E_0$) 2 x 30°

IP40



Max Dim (mm)
230 x 86



PDF Prepared: 25.01.2017 12:01pm, Last page update: Nov 2016



PIERLITE
professional lighting solutions