

issue date: 28/06/2020

INSTALLATION / WARRANTY INSTRUCTIONS PRODUCT BRAND

PIERLITE PRODUCT NAME / CODES PATHWAY AREA LIGHT (PATHWAY-24W)

PLEASE READ THESE INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR MAINTAINING THIS EQUIPMENT. THE PRODUCT IS DESIGNED FOR INSTALLATION AND MAINTENANCE IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS (AS3000) AND LOCAL REGULATIONS (WHERE APPLICABLE), BY AN AUTHORISED AND LICENCED ELECTRICIAN. THE INSTALLATION INSTRUCTIONS WERE CORRECT AT THE TIME OF PRINT. TO REFLECT CHANGES IN TECHNOLOGY AND AUSTRALIAN STANDARDS; GERARD LIGHTING RESERVES THE RIGHT TO AMEND THE INSTRUCTIONS WITHOUT NOTICE. UPDATED GUIDELINES CAN BE FOUND ON THE RELEVANT BRAND WEB SITE. **IMPORTANT** - THE PRODUCT MUST BE MAINTAINED AND OPERATED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS, FAILURE TO DO SO MAY DAMAGE THE PRODUCT AND SERVICES. IT IS STRONGLY RECOMMENDED THAT THIS IMPORTANT NOTE BE COMMUNICATED TO THE OWNER AND OR OPERATOR OF THE INSTALLATION AT THE TIME OF SITE COMMISSIONING. GOOD PRACTICE DOES NOT RECOMMEND THE 24/7 USE OF PRODUCTS WITHOUT THE APPLICATION OF SUITABLE SWITCH CYCLE INTERVALS. FURTHERMORE, WITH THE OMISSION OF NOMINATED SURVIVAL CURVES AND OR RECOMMENDED OPERATING HOURS, PRODUCT DESIGN EXPECTATIONS PROVIDE FOR A CONTINUAL DAILY USAGE OF 6 HOURS FOR RESIDENTIAL APPLICATIONS AND A CONTINUAL DAILY USAGE OF 12 HOURS FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS. ALL PRODUCTS MUST BE THOROUGHLY CLEANED ON A REGULAR BASIS AT INTERVALS THAT REFLECT IN THE INSTALLATION ENVIRONMENT, ENSURING THE OPTICAL PERFORMANCE, TOGETHER WITH THE ELECTRICAL, MECHANICAL AND STRUCTURAL INTEGRITY AS DESIGNED, IS MAINTAINED THROUGHOUT THE SERVICE LIFE OF THE PRODUCT.



For the latest product online reference data, simply install and activate a QR code scanner application on your smartphone. For more information, refer brand web.



1. PRODUCT SPECIFICATION:

Product brand	- Pierlite
Type of Protection	- Class I
IP Rating - for interior products, the IP rating nominated is "from below the ceiling" unless specifically nominated.	- IP66
Nominal design Voltage	- 240V
Circuit wattage	- refer rating label
Line current	- refer rating label
In-rush current	- 6.4A/48us
Important – when installing electronic or HID lighting equipment, the installer must consider the in-rush start current (if any) as documented on the control gear identification label when selecting appropriate circuit controls or protective devices.	
Power factor	- refer rating label
Nominal Freq. (Hz)	- 50 Hz
Rated Minimum / Maximum Ambient Temperature	- 50°C
Suitable for direct mounting on flammable surfaces	- Yes
Dimmable (if relevant refer brand web for approved list)	- NO
Installation orientation	- HORIZONTAL MOUNT
Designed application	- OUTDOOR/ ROADWAYS
Rated average design life	- in accordance with standard SA/SNZ TS 1158.6:2015

2. APPROVALS: The RCM marking of this product applies to AS/NZS CISPR15 (EMC) "Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment". This product is designed to conform to AS/NZS60598 "Luminaires, general requirements and tests".



3. STORAGE: Prior to installation products are to be stored in cool and dry conditions.

4. APPLICATION: The installation application and orientation of the product is designed in accordance with the nominated product IP rating, class designation and these installation instructions. Installation environments and operating conditions beyond these instructions are not recommended.

5. INSTALLATION / GENERAL: Installation of the product is to be completed by an authorized and licensed electrician, in accordance with these instructions, relevant Australia standards and local regulations (where applicable). Termination of product wiring, together with the installation of the product must be in a manner and orientation that maintains the integrity of the designated IP rating of the product For electronic control equipment (when supplied) DO NOT MEGGER between A and N.

6. INSTALLATION / SPECIAL CONDITIONS (relevant only for products approved for such an installation):

- (a) **products installed in high wind environments** must have suitable installation / fastening methods applied to ensure the product's mounting points are not damaged through, corrosion, constant vibration and or movement. Exterior products are designed with precise vertical aiming limits, which should not be exceeded. Any vertical floodlight aiming requirements should be specifically validated in writing with the relevant brand before consideration.
- (b) **products installed in corrosive or salt laden environments** require special consideration and such; specific product selection, inclusive of suitable fastening methods and extensive ongoing maintenance of products installed in these environments require professional advice. It is essential that all aspects of the product selection, material specification and maintenance are specifically designed for such use and a cleaning program be adopted that maintains the design integrity of the product.
- (c) **interior highbay products** must be vertically suspended. The method of suspension (chain etc) must be able to support at least 5 times the total weight of the fitting. Do not install where air movement will cause the fitting to swing about, causing wear and tear of attachment points. Luminaires should be installed where access for maintenance is practical and allows for maintenance to be completed in accordance with the manufacturer's recommendations.
- (d) **interior (downlight) products** must be installed to ensure the lamp unit or the driver (if supplied) are not covered with any combustible materials or insulation; minimum spacings nominated for these materials are mandatory. Unless otherwise specified, minimum clearances are in accordance with AS3000 requirements. The product is not designed for installation environments which restrict conventional airflow movements eg: enclosed boxes or concrete profiles. For dimming purposes please see the relevant product brand web site for the dimming compatibility chart. When mounting multiple fixtures to conductive structures, it is recommended that the structure is earthed. The mounting facilities provided for the transformer/driver (if any), need only be utilized if in the application of the product is required by AS3000. IP ratings stated (if any) are from below the ceiling unless stated otherwise and the installation of the product must be in a manner that maintains the integrity of the relevant IP rating.

7. MAINTENANCE:

(a) The supply must be isolated before opening or accessing the luminaire. Product maintenance is IMPORTANT and is critical to the products designed performance. The product is to be maintained in accordance with the manufacturer's instructions. For the latest product maintenance guides please go to relevant brand web site. Gerard Lighting is not responsible for any product not maintained in accordance with the recommended procedure or intervals. (b) **lamps (where provided):** The product is designed with the supplied (LEDs) / LAMP/s and it is strongly recommended that any LAMP / (LEDs) changes (if any) be made in accordance with the type, colour and brand supplied. For recommended LAMP / LED maintenance or operating guides (inclusive of recommended product switch cycles and mandatory run-in procedures for HID and Fluorescent lamps when used with dimming circuits), Gerard Lighting recommends the application of the lamp manufacturer's operating guidelines, which can be found on manufacturer's website. Gerard Lighting is not responsible for the product performance of alternative lamp/s used. As a member of FluroCycle, we encourage recycling of lamps and components. (c) **battery (where provided):** The battery is designed with a rated average battery design life of 25,000 hours in standby mode. The battery is supported with a standard 12 month warranty; conditional of the product being maintained and operated in accordance with the manufacturer's guidelines and tested in accordance with AS/NZS2293. For guidelines see product installation instructions or visit the relevant brand web site. (d) **for products supplied with glass visors or covers**, do not operate the product with a damaged visor or cover; it is recommended the product be turned off, area surrounding the product vacated and the damaged glass replaced by a professional installer immediately.

8. WARRANTY INSTRUCTIONS: For the purpose of warranty claims (if any) the following instructions apply:

Warranty components – THE PRODUCT, (identified as the THE PRODUCT only). **Warranty period** - The above components are provided with a warranty of Five (5) year/s or WARRANTED 25,000* hours of operation (which ever arrives first) against manufacturing defects or failure to perform to specifications for products installed by an authorised installer in accordance with the manufacturer's installation instructions and which have not been subject to incorrect operation or maintenance, unauthorised modification or damage arising from any intervening cause. **Warranty reference** - The warranty reference date commences from the date of purchase. **Warranty point of contact** – Gerard Lighting Pty Ltd, 96 Gow Street

Padstow NSW 2211,
phone T 02 9794 9300 contact – Gerard Lighting After Sales Support.

Warranty claim procedure – For the purpose of making a claim the customer must:

1. Contact the “point of contact” above and upon provision of proof of purchase the customer will receive a goods return advice (GRA) number. 2. At the customer’s expense, collect and return the goods to the “point of contact” with the issued GRA number. 3. Upon receipt of the goods, Gerard Lighting will review the claim and if found to be accepted, Gerard Lighting will return a replacement product to the customer to install at the customer’s expense. Alternatively if the claim is rejected, the customer may request the return of the goods at their expense.


Consumer Contracts - The benefits to the customer given by the Gerard Lighting warranty are in addition to other rights and remedies of the customer if the goods are the subject of a Consumer Contract under the Australian Consumer Law. In that event the following statement is required to be brought to the Consumer’s attention: - *Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.* **Limitation of Liability** – if the goods are not purchased by the customer under a Consumer Contract within the Australian Consumer Law then but not otherwise: - (a) the Company is not liable in tort for any loss or damage suffered by the customer or by any third party; and (b) in no circumstances is Gerard Lighting liable to the customer or to any third party for any loss of profits, loss of anticipated savings, economic loss or interruption of business or for any indirect or consequential loss (Consequential Loss). **Terms of Sale** – these Warranty provisions are in substitution for any inconsistent provisions in the Gerard Lighting Terms and Conditions of Sale in so far as they apply to the Warranty components.

ATTENTION

Please read these instructions carefully before attempting to install this product.
It is advisable to keep these instructions in a safe place for future reference.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

IF IN DOUBT, CONSULT A QUALIFIED ELECTRICIAN.



1. Installation requirements :
 - Max height 12M
 - Suitable pole caliber: $\Phi 32-40\text{mm}$
 - This product must be earthed
 - Use at least H05RN-F 3x1.0mm² or specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The cable must have a minimum cross sectional area of 1.0mm².
 - Connect the mains supply to the terminal, using the following colour code for the wiring:
 - Connect the Brown (Live) wire to the corresponding terminal on the terminal block marked L.
 - Connect the Green/Yellow (Earth) from the mains supply to the Earth terminal marked E or .
 - Connect the Blue (Neutral) wire to the corresponding terminal on the terminal block marked N.
 - Ensure that the connections are tight and no loose strands of wire are left out of the terminals
 - The input of the luminaires need to be connected by the Screw-type terminals,

The requests of the terminals:

1. 3pin screw terminal
 2. Rated voltage and current: 450VAC/>15A
 3. Rated connecting capacity: 1.0mm² -2.5 mm²
 4. Or you can choose to use the terminals that reach the Standards
- To prevent electrical shock, run off electricity, check your local electrical code and regulations.
 - terminal block not included, installation may require advice from a qualified person.
 - terminal box should be least IP66
 - the torsional force required for mounting screw is 8N.m
 - the luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0,263 m is not expected
 - terminal box should have cord anchorage (not included in delivery)

Fig 1 (release enclosure)


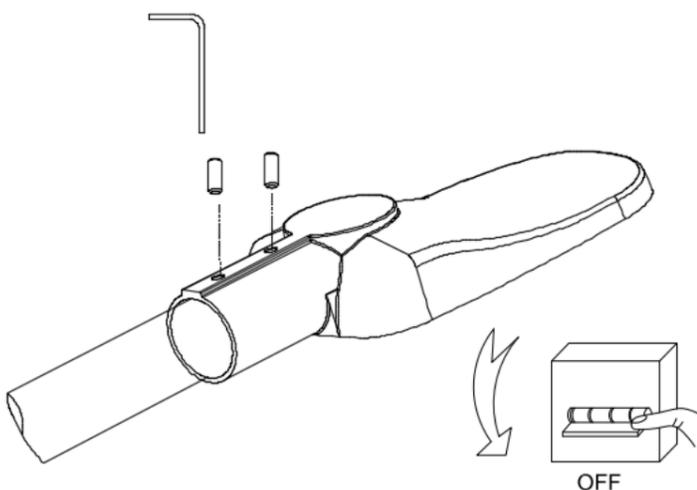


Fig 2(power supply cable installation)

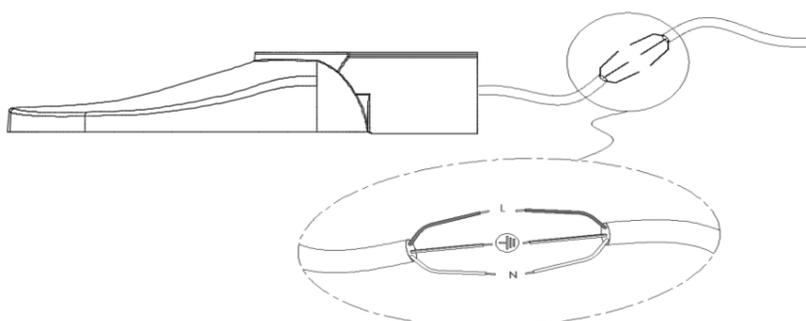

the wiring diagram of lamp with wires


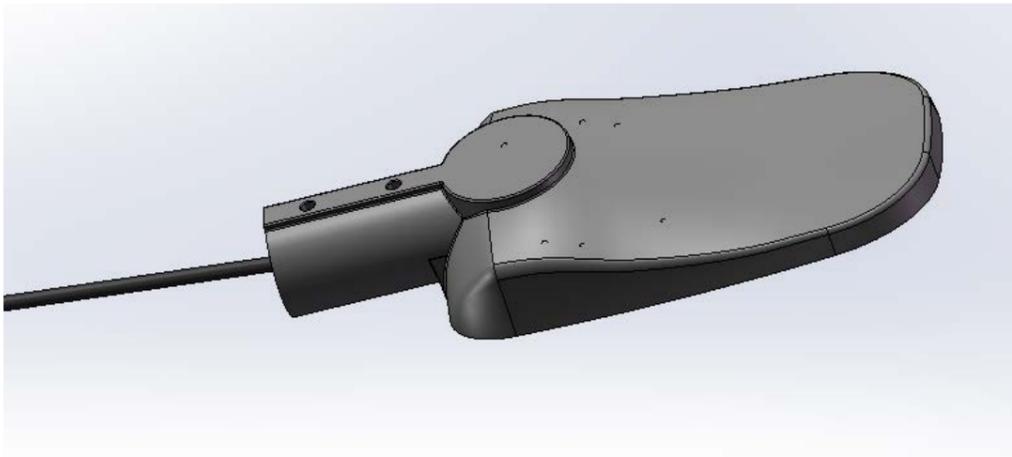


Fig 3 (fixed cover and install)



install the lamp & adaptor on the lamp post (4#Allen Key)



CAUTION

1. It is recommended not to open the optical chamber.
2. LED module and driver are non-serviceable parts. In the event of failure, please return entire luminaire to Gerard Lighting.
3. The luminaire is factory-fitted and tested to ensure optimal thermal and photometric performance.

REFER TO OUR WARRANTY, WARRANTY IS VOID IF MAINTAINED ON SITE WITHOUT APPROVAL FROM GERARD LIGHTING

LIGHTING CATEGORIES FOR PATHWAYS AND CYCLIST PATHS
Pedestrian or cycle orientated pathway eg footpaths, walkways, lanes, park paths & cycleways

The Table contains maximum spacings which, for the specified luminaire and lamp combinations, provide compliance with the Light Technical Parameters of Table 2.6 of AS/NZS 1158.3.1:2005.

Luminaire	Initial Lamp Flux	Wattage	Maintenance Factor	Upcast	Arrangement	Offset	Upward Waste Light Ratio	Mounting Height (m)	SPACING BETWEEN POLES (ACCORDING TO PATH WIDTH)											Category	ILLUMINANCE LEVELS (as per table 2.2 AS/NZS 1158.3.1:2020)		
									1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	Horizontal Illuminance		Vertical Illuminance		
																			Average E _h		Minimum E _{ph}	Minimum E _{pv}	
PATHWAY 24	3042	26	0.8	0	single	0.5	0%	2.5	5	5	4	3	3	2	-	-	-	-	PP1	10		21	
								4.5	11.1	12.1	12.1	10.9	10.7	10.4	8.8	6.7	5.1	-					
								6	15.3	15.3	15.2	15.3	15.3	15.2	14.8	14.3	13.3	12.5					
								7.5	18.6	18.7	18.8	16.6	18.7	18.8	18.7	18.6	18.3	18					
								10	14	14.7	14.9	15.2	15.3	15.3	14.9	14.5	14	13.2					
PATHWAY 24	3042	26	0.8	0	single	0.5	0%	2.5	6.9	7.1	6.9	6.9	6.5	6	4.9	4	3.6	2.6	PP2	7	1	0.3	
								4.5	13.2	13.2	13.1	13.1	13	12.9	12.4	11.9	10.6	9.1					
								6	17.5	17.6	17.4	17.5	7.5	17.6	17.5	17.3	16.9	16.2					
								7.5	21.6	21.7	21.5	21.6	21.6	21.7	21.6	21.6	21.5	21.4					
								10	25	25.6	25.9	26.1	26.2	26.3	26	25.7	25.4	24.9					
PATHWAY 24	3042	26	0.8	0	single	0.5	0%	2.5	9.4	9.5	9.4	9.4	9.5	9.5	9	8.1	7.4	7	PP3	3	0.5	0.1	
								4.5	16.1	16.1	16	16	16	16	16	16	15.9	15.8					
								6	20.5	20.5	20.4	20.5	20.5	20.5	20.5	20.5	20.5	20.5					
								7.5	25.2	25.3	25.1	25.2	25.2	25.3	25.2	25.2	25.3	25.3					
								10	31.6	31.7	31.6	31.6	31.6	31.7	31.6	31.6	31.7	31.7					
PATHWAY 24	3042	26	0.8	0	single	0.5	0%	2.5	10.9	1.1	10.9	10.9	11	11.1	10.9	10.9	10.5	10.4	PP4	1.5	0.25	0.05	
								4.5	18.7	18.7	18.5	18.4	18.4	18.5	18.4	18.4	18.3	18.5					
								6	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4					
								7.5	27.6	27.7	27.6	27.6	27.7	27.7	27.6	27.6	27.7	27.7					
								10	35.2	35.3	35.1	35.2	35.3	35.3	35.2	35.2	35.3	35.3					
PATHWAY 24	3042	26	0.8	0	single	0.5	0%	2.5	13.4	13.7	13.3	13.4	13.6	13.7	13.4	13.5	13.6	13.7	PP5	0.85	0.14	0.02	
								4.5	24.2	24.2	24	24	24	23.9	23.9	24	23.9	23.9					
								6	29.1	29.1	29	28.9	28.9	28.8	28.6	28.5	28.5	28.8					
								7.5	33.4	33.4	33.3	33.3	33.2	33.2	3.1	33.1	33	32.9					
								10	41	41	41	41	41	41	41	41	41	41					



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.