

DIM TO CHANGE COLOUR TEMPERATURE



LITELUX OPTICOLOUR LED DOWNLIGHT

Introducing new Litelux Opticolour LED Downlight, the colour temperature changes from cool to warm white as the light is dimmed. Excellent thermal performance to comply with the highest luminaire classification IC-4. Available in recessed and flush lens styles.

LITELUX OPTICOLOUR LED DOWNLIGHT

This high performing dimmable downlight with integrated driver utilizes new technology to change colour temperature from 6000K to 2900K with reduction in lumen output. Ergonomically designed wide blade solid retaining springs perfectly balanced for easy installation.

FEATURES

- Recessed downlight with integrated dimmable driver
- Colour temperature changes from cool to warm white as the light is dimmed
- Lumen output changes from 850lm at 6000K to 100lm at 2900K
- Complies to the highest rating IC-4
- Available in both flush and recessed diffused front lens, soft appearance
- Aluminium construction, white finish
- Complete with 1.2m flex and plug
- Easy to install clips
- IP65 from below/IP60 from above*
- 35,000 hrs rated average design life*
- Dimmable to 0% using LEDsmart+ dimmer range
- 3-year warranty

BENEFITS

- Dims smoothly from 6000K to 2900K as the light is dimmed
- Dimmable 100% to 0%
- Ergonomically designed wide blade solid springs perfectly balanced for easy installation
- Complete with flex and plug


SPECIFICATIONS

- Tested to new AS/NZ60598.2.2.2016 standards
- Complies with the highest rating IC-4, which permits use when covered
- Ambient Temperature: Ta40
- Colour Rendering Index: CRI >80
- Ingress Protection: IP65 when installed from below
- Dimmable**


APPLICATIONS

Residential and apartment interior space

Flush

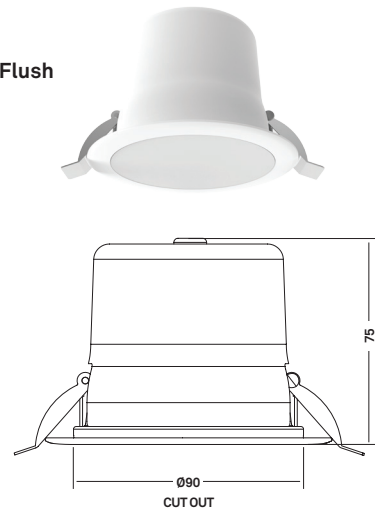

Recess

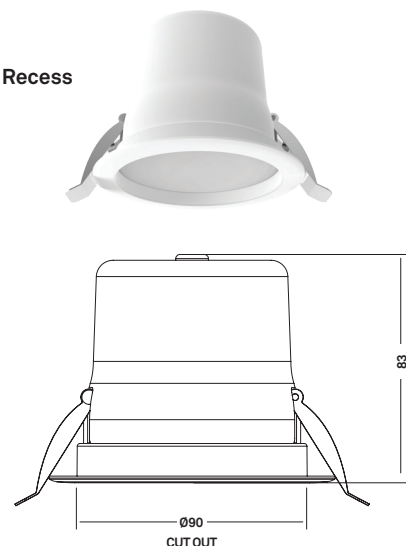

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLOUR TEMP	DIMENSION (MM)	CUT OUT (MM)	MASS (KG)	DIMMABLE
FLUSH LENS								
DLP60CFW	Flush Diffused, White	10W	850lm	6000K - 2900K	Ø105 x H 75mm	Ø90mm	0.25	Yes
RECESSED LENS								
DLP60CRW	Recessed Diffused, White	10W	850lm	6000K - 2900K	Ø105 x H 83mm	Ø90mm	0.25	Yes



*Rated average design life is based on application of PIERLITE's product operating and maintenance guidelines; see www.gerardlighting.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. ** Dimming performance may vary depending on the specifications of the dimmer being used. For best performance we recommend Diginet LEDsmart+ range.

