

INSTALLATION / WARRANTY INSTRUCTIONS

Issue Date: 19-10-2021

Cellite Remand - 2FT



PLEASE READ THESE INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR MAINTAINING THIS EQUIPMENT. THE PRODUCT IS DESIGNED FOR INSTALLATION AND MAINTENANCE IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS (AS/NZ3000), THESE INSTRUCTIONS AND LOCAL REGULATIONS (WHERE APPLICABLE), BY AN AUTHORISED AND LICENCED ELECTRICIAN. THE INSTALLATION INSTRUCTIONS WERE CORRECT AT THE TIME OF PRINT. TO REFLECT CHANGES IN TECHNOLOGY AND AUSTRALIAN STANDARDS; PIERLITE RESERVES THE RIGHT TO AMEND THE INSTRUCTIONS WITHOUT NOTICE. UPDATED GUIDELINES CAN BE FOUND ON RELEVANT BRAND WEB SITE.

IMPORTANT - THE PRODUCT MUST BE MAINTAINED AND OPERATED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS, FAILURE TO DO SO MAY DAMAGE THE PRODUCT AND SERVICES. IT IS STRONGLY RECOMMENDED THAT THIS IMPORTANT NOTE BE COMMUNICATED TO THE OWNER AND OR OPERATOR OF THE INSTALLATION AT THE TIME OF SITE COMMISSIONING. GOOD PRACTICE DOES NOT RECOMMEND THE 24/7 USE OF PRODUCTS WITHOUT THE APPLICATION OF SUITABLE SWITCH CYCLE INTERVALS. PIERLITE IS NOT RESPONSIBLE FOR ANY PRODUCT NOT MAINTAINED IN ACCORDANCE WITH THE RECOMMENDED PROCEDURES. ALL PRODUCTS SHOULD BE THOROUGHLY CLEANED ON A REGULAR BASIS TO ENSURE THE OPTICAL PERFORMANCE, TOGETHER WITH THE ELECTRICAL, MECHANICAL AND STRUCTURAL INTEGRITY AS DESIGNED, IS MAINTAINED THROUGHOUT THE SERVICE LIFE OF THE PRODUCT.



LUMEN SELECT

1. PRODUCT SPECIFICATION:

Type of protection
 IP rating
 IK rating
 Nominal voltage
 Nominal frequency
 Power factor
 Inrush current

Earth leakage
 Rated operating ambient temperature
 LED lifetime (L70/B10) rated
 Colour rendering index (CRI)
 LED control gear
 Available in emergency
 Emergency battery technology
 Installation orientation

Class I luminaire
 IP54 FRONT
 IK10
 220~240V AC
 50/60Hz
 See below table
 Cold start 0.54A (twidh=480µs measured at 50% Ipeak) at 230VAC
 0.18mA
 0 to +40°C
 >72,000 hours
 80
 DALI
 Yes, DALI and self-testing
 2-hour Lithium Iron Phosphate (LiFePO4)
 Recessed

2. CONSUMABLES

Description	QTY Required Per Fitting	Brand	Component Part Number	Dimensions (LxWxH) mm
2 hour Lithium Iron Phosphate (LiFePO4)	1	Pierlite	DGLCEM3200/2L12	70x53x27

3. APPROVALS: The RCM marking of this product applies to AS/NZS CISPR15 (EMC) "Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment". This product is designed to conform to AS/NZS60598 "Luminaires, general requirements and tests".

4. STORAGE: Prior to installation products are to be stored in cool and dry conditions.

5. APPLICATION: The installation application and orientation of the product is designed in accordance with the nominated product IP rating, class designation and these installation installations. Installation environments outside these conditions are not recommended.

6. Service & Operation (Emergency Version)

Normal Operation: Maintained Emergency Operation.

Battery: Sealed **Lithium Iron Phosphate (LiFePO4)** rechargeable battery pack. As per AS/NZS 2293, it is required that the battery pack is discharged and recharged at least once every 6 months.

In case of a replacement, same brand and type of battery pack must be used. Allow 24 hours charging time before carrying out any discharge tests.

Charge Duration: 16 Hours

Discharge Duration: M2 = 2 hours (Initial Test)

Test Switch: If manual test switch pressed, the fixture will operate from its battery supply.


Please ensure battery plug is connected to the inverter battery terminal.

7. ELECTRICAL CHARACTERISTICS

SKU to Order	Selectable Wattages by Dip Switches (W)	Line Current (A)	CCT	Driver Settings (mA)	Power Factor	Emergen cy	Night light	Factory Default Setting
CRMLS2D3	31	0.15	4K	1400	0.89	No	No	
	26	0.132		1150	0.82			Yes
	19	0.1		850	0.75			
	16	0.09		700	0.75			
	12	0.07		500	0.62			
CRMLS2D3M2	36	0.179	4K	1400	0.84	Yes	No	
	31	0.159		1150	0.82			Yes
	23	0.126		850	0.79			
	20	0.113		700	0.75			
	16	0.095		500	0.70			
CRMLS2D3N (center nightlight) / CRMLS2D3NE (end nightlight)	31	0.15	4K	1400	0.89	No	Yes	
	26	0.132		1150	0.82			Yes
	19	0.1		850	0.75			
	16	0.09		700	0.75			
	12	0.07		500	0.62			
CRMLS2D3M2N (center nightlight)/ CRMLS2D3M2NE (end nightlight)	35	0.179	4K	1400	0.84	Yes	Yes	
	30	0.159		1150	0.82			Yes
	23	0.126		850	0.79			
	20	0.113		700	0.75			
	16	0.095		500	0.70			

8. LINE DIAGRAMS AND DIMENSIONS

Fitting Size	Type of Mounting	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	Ceiling Cutout (mm)	Bracket Required
4ft	Concrete	1280	138	100	8.2	Must be used with Pierlite Cel skin	CRM4FTCELSKIN (ordered separately)
	Plaster with Bracket					L= 1238 x W= 118	Supplied with luminaire
2ft	Concrete	680			6.7	Must be used with Pierlite Cel skin	CRM2FTCELSKIN (ordered separately)
	Plaster with Bracket					L= 638 x W= 118	Supplied with luminaire

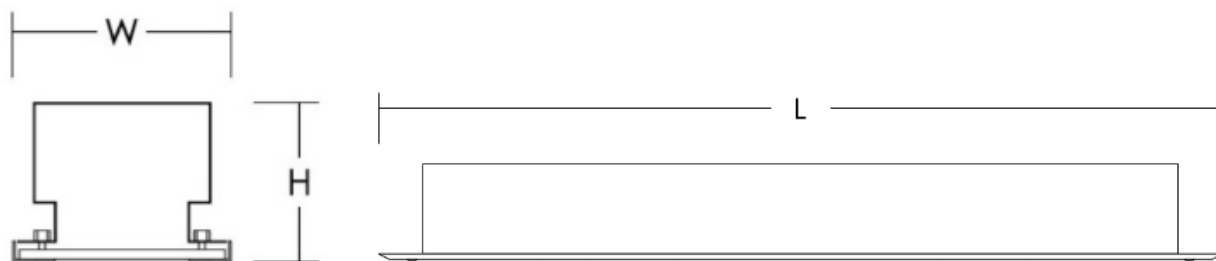

9. LUMEN SELECT (contractor selectable output)

Pierlite's lumen select products allows all licensed electricians to purchase one luminaire that can be set as multiple fixed wattages/ fixed lumen outputs. By offering this capability within one fitting it provides the following benefits

- One fitting multiple fixed outputs
- Less stocked items
- Tool less changeable settings
- IES files available for all available for wattages shown in the below table
- No control system or software required to change fixed output

The Remand luminaire has been factory set to the default level listed in the below table, if a different wattage/lumen output is required the licensed electrician can easily change the driver dip switches to the settings shown in the below table.

System Wattage (W)	Driver Settings (mA)	Driver Dip Switch Settings
31	1400	
26W (factory default setting)	1150	
19	850	
16	700	
12	500	

10. DALI CONTROL GEAR: The LED driver and emergency control gear are both controllable through a DALI control system. A DALI connection is not required in a non-systemized electrical system, if DALI is not required do not connect it.

Note: when designing the DALI system please refer to the table below for the number of DALI addresses.

Control gear	Function	Number of Addresses
LED Driver	Dimming, on/off & feedback	1
Emergency Inverter	Testing & Reporting	1

11. INSTALLATION / GENERAL: Installation of the product is to be completed by an authorized and licensed electrician, in accordance with these instructions, relevant Australia standards and local regulations (where applicable). Termination of product wiring, together with the installation of the product must be in a manner and orientation that maintains the integrity of the designated IP rating of the product for electronic control equipment (when supplied) DO NOT MEGGER between A and N.

Installation:

- Isolate the supply circuit as per the Australian standard and your SWMS.
- Remove both the diffuser frame and the gear tray using a security torx head and place in a safe location to ensure the product does not get damaged while the housing is being installed.
- Install the housing with the selected mounted system.
- Connect electrical cables as specified by all Australian and New Zealand standards, must be installed by a licensed electrician. Ensure the earth is connected.

Non-emergency luminaire electrical connections

- Connect earth into E or terminal
- Connect Neutral into N terminal
- Connect active into A terminal

Night light luminaire electrical connections

- Connect earth into E or terminal
- Connect Neutral into N terminal (shared between Night light and Mains lighting)
- Connect active into A1 terminal (mains lighting)
- Connect active into A2 terminal (Night light)

Emergency luminaire electrical connections

- Connect earth into E or terminal
- Connect Neutral into N terminal
- Connect switched active into A terminal
- Connect unswitched active into A UNSW terminal

- Select the wattage/lumen output by changing the dip switches on the LED driver, please refer to section 10 of this installation sheet.
- Secure the gear tray to the luminaire body ensuring all cables are clear from pinching or possible damage.
- Tighten the screws securing the gear tray.
- Installation of the diffuser frame, lightly screw the supplied security torx head screws into the diffuser frame. Place diffuser frame to the body and tighten screws.
- Ensure the IP rating of the installation is equal to that of the tested IP rating of the fitting.
Note: the IP rating of the fitting is IP54.
- Test fitting as per the relevant Australian standard and as per your SWMS.

12. MAINTENANCE:

(a) The supply must be isolated before opening or accessing the luminaire. Product maintenance is IMPORTANT and is critical to the products designed performance. The product is to be maintained in accordance with the manufacturer's instructions. For the latest product maintenance guides please go to relevant brand web site. Pierlite is not responsible for any product not maintained in accordance with the recommended procedure or intervals.

(b) Lamps (where provided): The product is designed with the supplied (LEDs) / LAMP/s and it is strongly recommended that any LAMP / (LEDs) changes (if any) be made in accordance with the type, colour and brand supplied. For recommended LAMP / LED maintenance or operating guides (inclusive of recommended product switch cycles and mandatory run-in procedures for HID and Fluorescent lamps when used with dimming circuits), Pierlite recommends the application of the lamp manufacturer's operating guidelines, which can be found on manufacturer's website. Pierlite is not responsible for the product performance of alternative lamp/s used. As a member of FluroCycle, we encourage recycling of lamps and components.

(c) Battery (where provided): The battery is designed with a rated average battery design life of 50,000 hrs. in standby mode. The battery is supported with a standard **Four (4) year warranty**; conditional of the product being maintained and operated in accordance with the manufacturer's guidelines and tested in accordance with AS/NZS2293. For guidelines see product installation instructions or visit the relevant brand web site.

(d) For products supplied with glass visors or covers, do not operate the product with a damaged visor or cover; it is recommended the product be turned off, area surrounding the product vacated and the damaged glass replaced by a professional installer immediately.

13. WARRANTY INSTRUCTIONS: For the purpose of warranty claims (if any) the following instructions apply:

Warranty period - The above components are provided with a warranty of **Five (5) years** against manufacturing defects or failure to perform to specifications for products installed by an authorised installer in accordance with the manufacturer's installation instructions and which have not been subject to incorrect operation or maintenance, unauthorised modification or damage arising from any intervening cause.

Warranty reference - The warranty reference date commences from the date of purchase.

Warranty point of contact – Pierlite Pty Ltd, 96 Gow Street Padstow NSW 2211, phone T 1300 799 300 contact – Pierlite After Sales Support.

Warranty claim procedure – For the purpose of making a claim the customer must:

1. Contact the "point of contact" above and upon provision of proof of purchase the customer will receive a goods return advice (GRA) number. 2. At the customer's expense, collect and return the goods to the "point of contact" with the issued GRA number. 3. Upon receipt of the goods, Pierlite will review the claim and if found to be accepted, Pierlite will return a replacement product to the customer to install at the customer's expense. Alternatively, if the claim is rejected, the customer may request the return of the goods at their expense.

Consumer Contracts - The benefits to the customer given by the Pierlite warranty are in addition to other rights and remedies of the customer if the goods are the subject of a Consumer Contract under the Australian Consumer Law. In that event the following statement is required to be brought to the Consumer's attention: - *Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.*

Limitation of Liability – if the goods are not purchased by the customer under a Consumer Contract within the Australian Consumer Law then but not otherwise; - (a) the Company is not liable in tort for any loss or damage suffered by the customer or by any third party; and (b) in no circumstances is Pierlite liable to the customer or to any third party for any loss of profits, loss of anticipated savings, economic loss or interruption of business or for any indirect or consequential loss (Consequential Loss).

Terms of Sale – these Warranty provisions are in substitution for any inconsistent provisions in the Pierlite Terms and Conditions of Sale in so far as they apply to the Warranty components.

INSTALLATION / WARRANTY INSTRUCTIONS

Issue Date: 19-10-2021

Cellite Remand - 4FT



PLEASE READ THESE INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR MAINTAINING THIS EQUIPMENT. THE PRODUCT IS DESIGNED FOR INSTALLATION AND MAINTENANCE IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS (AS/NZ3000), THESE INSTRUCTIONS AND LOCAL REGULATIONS (WHERE APPLICABLE), BY AN AUTHORISED AND LICENCED ELECTRICIAN. THE INSTALLATION INSTRUCTIONS WERE CORRECT AT THE TIME OF PRINT. TO REFLECT CHANGES IN TECHNOLOGY AND AUSTRALIAN STANDARDS; PIERLITE RESERVES THE RIGHT TO AMEND THE INSTRUCTIONS WITHOUT NOTICE. UPDATED GUIDELINES CAN BE FOUND ON RELEVANT BRAND WEB SITE.

IMPORTANT - THE PRODUCT MUST BE MAINTAINED AND OPERATED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS, FAILURE TO DO SO MAY DAMAGE THE PRODUCT AND SERVICES. IT IS STRONGLY RECOMMENDED THAT THIS IMPORTANT NOTE BE COMMUNICATED TO THE OWNER AND OR OPERATOR OF THE INSTALLATION AT THE TIME OF SITE COMMISSIONING. GOOD PRACTICE DOES NOT RECOMMEND THE 24/7 USE OF PRODUCTS WITHOUT THE APPLICATION OF SUITABLE SWITCH CYCLE INTERVALS. PIERLITE IS NOT RESPONSIBLE FOR ANY PRODUCT NOT MAINTAINED IN ACCORDANCE WITH THE RECOMMENDED PROCEDURES. ALL PRODUCTS SHOULD BE THOROUGHLY CLEANED ON A REGULAR BASIS TO ENSURE THE OPTICAL PERFORMANCE, TOGETHER WITH THE ELECTRICAL, MECHANICAL AND STRUCTURAL INTEGRITY AS DESIGNED, IS MAINTAINED THROUGHOUT THE SERVICE LIFE OF THE PRODUCT.



LUMEN SELECT

1. PRODUCT SPECIFICATION:

Type of protection

IP rating

IK rating

Nominal voltage

Nominal frequency

Power factor

Inrush current

Earth leakage

Rated operating ambient temperature

LED lifetime (L70/B10) rated

Colour rendering index (CRI)

LED control gear

Available in emergency

Emergency battery technology

Installation orientation

Class I luminaire

IP54 FRONT

IK10

220~240VAC

50/60Hz

See below table

Cold start 2A(twidth=860µs measured at 50% Ipeak) at 230VAC

0.2mA

0 to +40°C

>72,000 hours

80

DALI

Yes, DALI and self-testing

4-hour Lithium Iron Phosphate (LiFePO4)

Recessed

2. CONSUMABLES

Description	QTY Required Per Fitting	Brand	Component Part Number	Dimensions (LxWxH) mm
4 hour Lithium Iron Phosphate (LiFePO4)	1	Pierlite	DGLCEM6000/2L22	135x55x30

3. APPROVALS: The RCM marking of this product applies to AS/NZS CISPR15 (EMC) "Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment". This product is designed to conform to AS/NZS60598 "Luminaires, general requirements and tests".

4. STORAGE: Prior to installation products are to be stored in cool and dry conditions.

5. APPLICATION: The installation application and orientation of the product is designed in accordance with the nominated product IP rating, class designation and these installation installations. Installation environments outside these conditions are not recommended.

6. Service & Operation (Emergency Version)

Normal Operation: Maintained Emergency Operation.

Battery: Sealed **Lithium Iron Phosphate (LiFePO4)** rechargeable battery pack. As per AS/NZS 2293, it is required that the battery pack is discharged and recharged at least once every 6 months.

In case of a replacement, same brand and type of battery pack must be used. Allow 24 hours charging time before carrying out any discharge tests.

Charge Duration: 16 Hours

Discharge Duration: M4 = 4 hours (Initial Test)

Test Switch: If manual test switch pressed, the fixture will operate from its battery supply.


Please ensure battery plug is connected to the inverter battery terminal.

7. ELECTRICAL CHARACTERISTICS

SKU to Order	Selectable Wattages by Dip Switches (W)	Line Current (A)	CCT	Driver Settings (mA)	Power Factor	Emergency	Night light	Factory Default Setting
CRMLS4D3	60	0.258	4K	1400	0.95	No	No	
	50	0.221		1150	0.94			Yes
	37	0.168		850	0.89			
	30	0.149		700	0.82			
	22	0.108		500	0.82			
CRMLS4D3M4	64	0.278	4K	1400	0.95	Yes	No	
	55	0.242		1150	0.94			Yes
	41	0.190		850	0.89			
	34	0.169		700	0.83			
	26	0.129		500	0.82			
CRMLS4D3N (center nightlight) / CRMLS4D4NE (end nightlight)	60	0.258	4K	1400	0.95	No	Yes	
	50	0.221		1150	0.94			Yes
	37	0.168		850	0.89			
	30	0.149		700	0.82			
	22	0.108		500	0.82			
CRMLS4D3M4N (center nightlight)/ CRMLS4D3M4NE (end nightlight)	64	0.278	4K	1400	0.95	Yes	Yes	
	55	0.242		1150	0.94			Yes
	41	0.190		850	0.89			
	34	0.169		700	0.83			
	26	0.129		500	0.82			

8. LINE DIAGRAMS AND DIMENSIONS

Fitting Size	Type of Mounting	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	Ceiling Cutout (mm)	Bracket Required
4ft	Concrete	1280	138	100	8.2	Must be used with Pierlite Cel skin	CRM4FTCELSKIN (ordered separately)
	Plaster with Bracket					L= 1238 x W= 118	Supplied with luminaire
2ft	Concrete	680			6.7	Must be used with Pierlite Cel skin	CRM2FTCELSKIN (ordered separately)
	Plaster with Bracket					L= 638 x W= 118	Supplied with luminaire

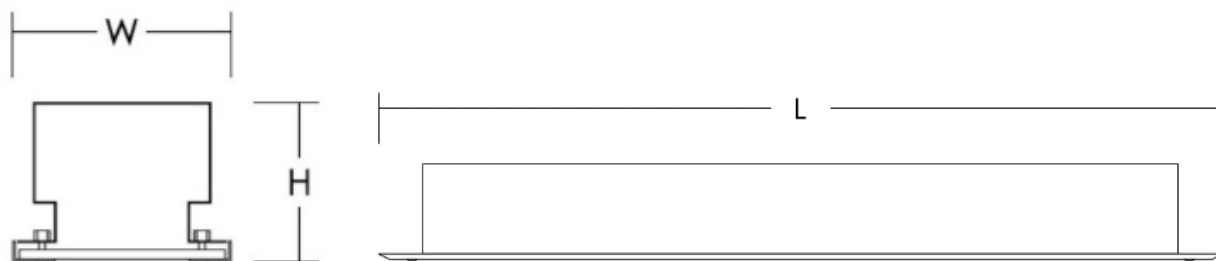

9. LUMEN SELECT (contractor selectable output)

Pierlite's lumen select products allows all licensed electricians to purchase one luminaire that can be set as multiple fixed wattages/fixed lumen outputs. By offering this capability within one fitting it provides the following benefits

- One fitting multiple fixed outputs
- Less stocked items
- Tool less changeable settings
- IES files available for all available for wattages shown in the below table
- No control system or software required to change fixed output

The Remand luminaire has been factory set to the default level listed in the below table, if a different wattage/lumen output is required the licensed electrician can easily change the driver dip switches to the settings shown in the below table.

System Wattage (W)	Driver Settings (mA)	Lumen Output (lm)	Driver Dip Switch Settings
60	1400	5911	
50W (factory default setting)	1150	5070	
37	850	3793	
30	700	3111	
22	500	2286	

10. DALI CONTROL GEAR: The LED driver and emergency control gear are both controllable through a DALI control system. A DALI connection is not required in a non-systemized electrical system, if DALI is not required do not connect it.

Note: when designing the DALI system please refer to the table below for the number of DALI addresses.

Control gear	Function	Number of Addresses
LED Driver	Dimming, on/off & feedback	1
Emergency Inverter	Testing & Reporting	1

11. INSTALLATION / GENERAL: Installation of the product is to be completed by an authorized and licensed electrician, in accordance with these instructions, relevant Australia standards and local regulations (where applicable). Termination of product wiring, together with the installation of the product must be in a manner and orientation that maintains the integrity of the designated IP rating of the product for electronic control equipment (when supplied) DO NOT MEGGER between A and N.

Installation:

- a) Isolate the supply circuit as per the Australian standard and your SWMS.
- b) Remove both the diffuser frame and the gear tray using a security torx head and place in a safe location to ensure the product does not get damaged while the housing is being installed.
- c) Install the housing with the selected mounted system.
- d) Connect electrical cables as specified by all Australian and New Zealand standards, must be installed by a licensed electrician. Ensure the earth is connected.

Non-emergency luminaire electrical connections

- a. Connect earth into E or terminal
- b. Connect Neutral into N terminal
- c. Connect active into A terminal

Night light luminaire electrical connections

- a. Connect earth into E or terminal
- b. Connect Neutral into N terminal (shared between Night light and Mains lighting)
- c. Connect active into A1 terminal (mains lighting)
- d. Connect active into A2 terminal (Night light)

Emergency luminaire electrical connections

- a. Connect earth into E or terminal
- b. Connect Neutral into N terminal
- c. Connect switched active into A terminal
- d. Connect unswitched active into A UNSW terminal

- e) Select the wattage/lumen output by changing the dip switches on the LED driver, please refer to section 10 of this installation sheet.
- f) Secure the gear tray to the luminaire body ensuring all cables are clear from pinching or possible damage.
- g) Tighten the screws securing the gear tray.
- h) Installation of the diffuser frame, lightly screw the supplied security torx head screws into the diffuser frame. Place diffuser frame to the body and tighten screws.
- i) Ensure the IP rating of the installation is equal to that of the tested IP rating of the fitting.
Note: the IP rating of the fitting is IP54.
- j) Test fitting as per the relevant Australian standard and as per your SWMS.

12. MAINTENANCE:

(a) The supply must be isolated before opening or accessing the luminaire. Product maintenance is IMPORTANT and is critical to the products designed performance. The product is to be maintained in accordance with the manufacturer's instructions. For the latest product maintenance guides please go to relevant brand web site. Pierlite is not responsible for any product not maintained in accordance with the recommended procedure or intervals.

(b) Lamps (where provided): The product is designed with the supplied (LEDs) / LAMP/s and it is strongly recommended that any LAMP / (LEDs) changes (if any) be made in accordance with the type, colour and brand supplied. For recommended LAMP / LED maintenance or operating guides (inclusive of recommended product switch cycles and mandatory run-in procedures for HID and Fluorescent lamps when used with dimming circuits), Pierlite recommends the application of the lamp manufacturer's operating guidelines, which can be found on manufacturer's website. Pierlite is not responsible for the product performance of alternative lamp/s used. As a member of FluroCycle, we encourage recycling of lamps and components.

(c) Battery (where provided): The battery is designed with a rated average battery design life of 50,000 hrs. in standby mode. The battery is supported with a standard **Four (4) year warranty**; conditional of the product being maintained and operated in accordance with the manufacturer's guidelines and tested in accordance with AS/NZS2293. For guidelines see product installation instructions or visit the relevant brand web site.

(d) For products supplied with glass visors or covers, do not operate the product with a damaged visor or cover; it is recommended the product be turned off, area surrounding the product vacated and the damaged glass replaced by a professional installer immediately.

13. WARRANTY INSTRUCTIONS: For the purpose of warranty claims (if any) the following instructions apply:

Warranty period - The above components are provided with a warranty of **Five (5) years** against manufacturing defects or failure to perform to specifications for products installed by an authorised installer in accordance with the manufacturer's installation instructions and which have not been subject to incorrect operation or maintenance, unauthorised modification or damage arising from any intervening cause.

Warranty reference - The warranty reference date commences from the date of purchase.

Warranty point of contact – Pierlite Pty Ltd, 96 Gow Street Padstow NSW 2211, phone T 1300 799 300 contact – Pierlite After Sales Support.

Warranty claim procedure – For the purpose of making a claim the customer must:

1. Contact the "point of contact" above and upon provision of proof of purchase the customer will receive a goods return advice (GRA) number. 2. At the customer's expense, collect and return the goods to the "point of contact" with the issued GRA number. 3. Upon receipt of the goods, Pierlite will review the claim and if found to be accepted, Pierlite will return a replacement product to the customer to install at the customer's expense. Alternatively, if the claim is rejected, the customer may request the return of the goods at their expense.

Consumer Contracts - The benefits to the customer given by the Pierlite warranty are in addition to other rights and remedies of the customer if the goods are the subject of a Consumer Contract under the Australian Consumer Law. In that event the following statement is required to be brought to the Consumer's attention: - *Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.*

Limitation of Liability – if the goods are not purchased by the customer under a Consumer Contract within the Australian Consumer Law then but not otherwise; - (a) the Company is not liable in tort for any loss or damage suffered by the customer or by any third party; and (b) in no circumstances is Pierlite liable to the customer or to any third party for any loss of profits, loss of anticipated savings, economic loss or interruption of business or for any indirect or consequential loss (Consequential Loss).

Terms of Sale – these Warranty provisions are in substitution for any inconsistent provisions in the Pierlite Terms and Conditions of Sale in so far as they apply to the Warranty components.