

CLIP™ SERIES

CALIBRE SERIES (CATEGORY P & V)

FEATURES

- Clip 28 26WCF-150W HID lamps
- Clip 34 150 – 400W HID lamps
- Integral 250V HPF on removable control gear tray
- Self locking opening catch
- Adjustable upcast of 0°, 5°, 10° and 15° for post top mounting
- Control gear and lamp are electrically isolated, via a double pole isolation switch, when opened

KEY APPLICATIONS

- Roadway (P & V)
- Pedestrian
- Outdoor Car Park
- Amenity
- Institutions



The Clip™ Series is a highly innovative and functional luminaire. The simplicity of its use is combined with the attractive appearance. Access to the lamp and control gear is via a single action of the discrete stainless steel latch. The die-cast aluminium body, together with extensive use of stainless steel, silicon and other quality materials allows both the optical and gear compartments to enjoy an IP66 rating, reducing maintenance costs and increasing performance to exceptional levels.

The Clip™ Series will complement any streetscape with numerous configurations: The Clip 28 is available in lamp powers up to 150W. The Clip 34 extends this range to 600W. Both the Clip 28 and Clip 34 can be mounted via side entry or post top. The high performance optical system features an adjustable lamp position and curved glass visor or optional aeroscreen glass and dished acrylic visors provide an extensive distribution selection. The integral control gear is isolated upon opening of the luminaire and is secured on a removable gear tray. PE control is available as an option.

LUMINAIRE CONSTRUCTION

- High pressure die-cast aluminium body
- IP66 optical & gear chamber with curved glass visor
- Side entry mounting
- Post top mounting
- Black polyester powdercoat finish as standard

OPTIONS AVAILABLE

- Aeroscreen flat glass visor
- Photoelectric control switch (limited wattages)
- Integrated louvres for control of glare and spill light
- Clip 34 600W HID lamp, remote control gear
- Side entry adaptor kit for small spigot sizes 43-49mm
- Polyester powdercoat finish in various colours



Description	Lamp	Base	Weight (kg)	Order Code
Clip 28 42W CF	Lynx-CFTE/42W	GX24q-4	6.20	EC9700L
Clip 28 70W HPS	SHP/SHPT70	E27	7.50	EC4100L
Clip 28 100W HPS	SHP/SHPT100	E40	7.80	EC47103L
Clip 28 150W HPS	SHP/SHPT150	E40	8.00	EC4200L
Clip 28 75W MH	MP70/CI/U	E27	7.50	EC27101L
Clip 28 100W MH	MP100/CI/U	E27	7.80	EC19100L
Clip 28 150W MH	MH150	E27	8.00	EC2600L
Clip 28 50W MV	HSLBW50	E27	7.00	EC1000L
Clip 28 80W MV	HSLBW80	E27	7.00	EC1100L
Clip 28 125W MV	HSLBW125	E27	7.20	EC1300L
Clip 34 150W HPS	SHP/SHPT150	E40	14.00	EF4200L
Clip 34 250W HPS	SHP/SHPT250	E40	14.50	EF43100L
Clip 34 400W HPS	SHP/SHPT400	E40	15.00	EF4400L
Clip 34 600W HPS*	SHPT600	E40	12.00	EF4600L*
Clip 34 150W MH	MP150/CO/U	E40	14.00	EF2600L
Clip 34 250W MH	MH250	E40	14.50	EF21103L
Clip 34 400W MH	MH400	E40	15.00	EF2200L
Clip 34 250W MV	HSLBW250	E40	13.00	EF1500L
Clip 34 400W MV	HSLBW400	E40	13.50	EF16100L

Note: * Remote Control Gear.
The above codes are for standard products only. Please refer to your local SLA representative for more options.

For more information,
scan the QR code:




CLIP™ SERIES


CLIP™ SERIES MAIN FEATURES

Electrical Safety and ease of access


1. Control gear and lamp are electronically isolated, via a double pole isolation switch, when opened.
2. Access is gained via a single discrete stainless steel latch.
3. Die cast aluminium body fully open.
4. Self-locking opening catch.



INSTALLATION FLEXIBILITY

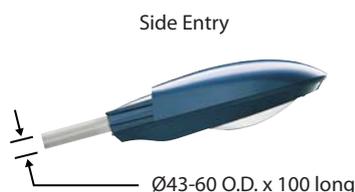

Side entry suitable for 50 - 60mm O.D. spigots. An adaptor kit is available for small spigot sizes 43-49mm O.D.




Post Top 60mm and 73mm diameter column adjustable upcast 0°, 5°, 10° and 15°


OPTICAL PERFORMANCE

Electrical Safety and ease of access

Available in the Eclapak sealed optical chamber and Optitec reflector systems, shallow or flat glass and each with numerous distribution configurations, providing flexible, high performance lighting distribution. Integrated urban louvres are available for control of obtrusive light behind and in front of the luminaire.




Eclapak system





Optitec system




Urban louvres



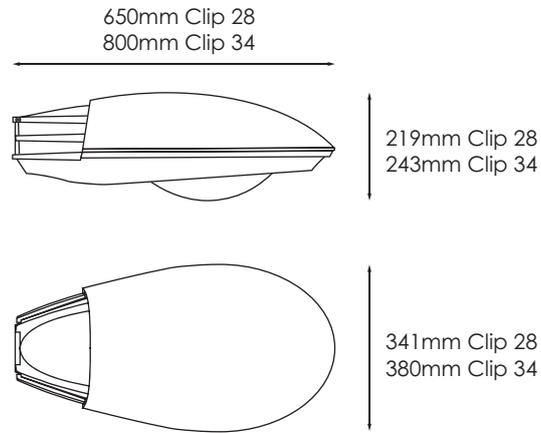

Clip Series 28 VB 100W MH



Clip Series 34 VB 400W MH

For more information,
scan the QR code:

