

**INSTALLATION / WARRANTY INSTRUCTIONS**

PRODUCT BRAND: PIERLITE  
PRODUCT NAME: Cellite Royale Bed light

Issue Date: 28/06/2024

Please read these installation instructions carefully before installing or maintaining this equipment. The product is designed for installation and maintenance in accordance with relevant Australian standards (AS/NZ3000), by an authorised and licensed electrician. The installation instructions were correct at the time of print. To reflect changes in technology and Australian and New Zealand standards; Pierlite reserves the right to amend the instructions without notice. Updated guidelines can be found on relevant brand website.




**1. PRODUCT SPECIFICATION:**

| Luminaire Name                 | Cellite Royale   |            |
|--------------------------------|--|------------|
| SKU                            | CRLM8W3EPB   | CRLM8W4EPB |
| Diffuser Type:                 | Opal   |            |
| Type:                          | Bed light  |            |
| Optic                          | Symmetrical  |            |
| Type of protection             | Class I luminaire  |            |
| Type of protection             | IK10   |            |
| IK rating                      | IP40   |            |
| Nominal voltage                | 220 - 240V   |            |
| Nominal frequency              | 50 / 60Hz  |            |
| Power factor                   | >0.8 to >9   |            |
| Number of wattages per fitting | 1  |            |
| Wattage                        | 8  |            |
| Lumen Output (exit lumens)     | 561lm  |            |
| Efficacy                       | 74   |            |
| Line Current                   | 0.03A  |            |
| Inrush current                 | Cold start 1.4A(twidth=16µs measured at 50% lpeak) at 230VAC |            |
| Earth leakage                  | 0.04A  |            |
| Surge protection rating        | L-N 2KA, L-E: 4KA  |            |
| Ambient temperature            | -25°C to +40°C   |            |
| LED lifetime                   | L70 B10 72,000hours  |            |
| Colour temperature             | 3000K  | 4000K      |
| Colour rendering index (CRI)   | >80  |            |
| LED control gear               | Integral European driver                                     |            |
| Flicker free                   | Yes  |            |
| Control system:                | Non Dim  |            |
| DALI Addresses Required        | N/A  | N/A        |
| Housing material and finish:   | Steel housing and facia                                      |            |
| Diffuser Material              | Polycarbonate  |            |
| Electrical connection          | Direct to 6.0mm <sup>2</sup> terminal block                  |            |
| Cable entry                    | 2x 20mm cable entry - 1 on either end                        |            |
| Installation type              | Wall   |            |
| Diffuer Screw Type:            | T25 Security Torx  |            |
| Dimensions (LxWxH)             | 330mm x 140mm x 90mm   |            |
| Cutout Dimensions (LxW)        | 303mm x 115mm  |            |
| Net weight of luminaire        | 2kg  |            |
| Warranty                       | 5 year warranty  |            |
| Suitability                    | Indoor   |            |

## 2. Accessories

| Part Number | Description  |
|-------------|--|
| 97000405    | Concrete skin – required for all concrete installations  |
| 99034224    | Plaster bracket – required for all plaster installations |
| ST25TBAR    | Pierlite security Torx T25 tbar tool                     |

## 3. LINE DIAGRAMS

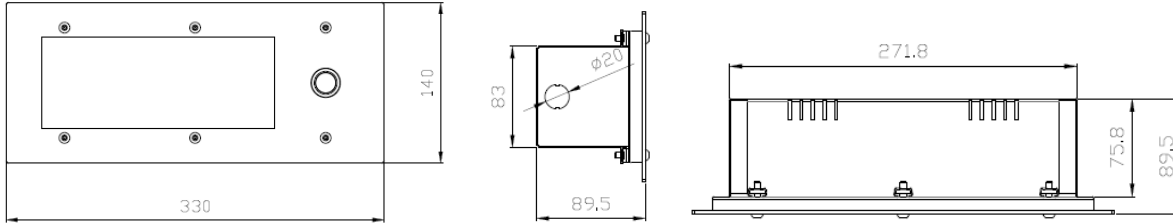


**4. INSTALLATION / GENERAL:** Installation of the product is to be completed by an authorized and licensed electrician, in accordance with these instructions, relevant Australia standards and local regulations (where applicable). Termination of product wiring together with the installation of the product must be in a manner and orientation that maintains the integrity of the designated IP rating of the product for electronic control equipment (when supplied) DO NOT MEGGER between A and N.

Installation:

Ensure the appropriate bracket has been ordered for your installation type. Refer to the bracket installation instructions for further information.

- Isolate the supply circuit as per the Australian standard and your SWMS.
- Remove the fascia using a T25mm security Torx bit or the Pierlite ST25TBAR security Torx T25 tbar tool and remove the gear tray by unscrewing the nuts from the gear tray and the earth wires from the spade terminals. Place the gear tray in a safe space until ready to install.
- Install the housing with the selected mounting system, Concrete celskin or plaster brackets.
- Suspend the gear tray from the lanyards
- Connect the supply wires to the terminal block. Ensure sure all connections and cabling complies to AS3000.  
**Note:** Ensure the correct wires go to the correct terminals as per below



Mains only wiring connections.

- Secure the gear tray to the luminaire housing ensuring earth wires are reinstalled to the spade terminal before securing the gear tray.
- Tighten the nuts securing the gear tray to a maximum of 4Nm
- Installation of the fascia, select the side the switch will be on, lightly screw the supplied T25mm security Torx screws using the Pierlite ST25TBAR security Torx T25 tbar tool hex head screws into the 6 holes around the housing, once all the screws are in place tighten the fascia down to the housing to a maximum of 4Nm.
- Ensure the IP rating of the installation is equal to that of the tested IP rating of the fitting.
- Test fitting as per the relevant Australian standard and as per your SWMS.
- Add anti pick silicone to the surround of the fascia to preventing items to be hid behind the fascia.

**IMPORTANT** - the product must be maintained and operated in accordance with the manufacturer's instructions, failure to do so may damage the product and services. It is strongly recommended that this important note be communicated to the owner and/or operator of the installation at the time of site commissioning. Good practice does not recommend the 24/7 use of products without the application of suitable switch cycle intervals. Furthermore, with the omission of nominated survival curves and/or recommended operating hours, product design expectations provide for a continual daily usage of 6 hours for residential applications and a continual daily usage of 12 hours for commercial and industrial applications. All products must be thoroughly cleaned on a regular basis at intervals that reflect in the installation environment, ensuring the optical performance, together with the electrical, mechanical, and structural integrity as designed, is maintained throughout the service life of the product.

**APPROVALS:** The RCM marking of this product applies to AS/NZS CISPR15 (EMC) "Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment".



This product is designed to conform to AS/NZS60598 "Luminaires, general requirements and tests".

**STORAGE:** Prior to installation products are to be stored in cool and dry conditions.

**APPLICATION:** The installation application and orientation of the product is designed in accordance with the nominated product IP rating, class designation and these installation installations. Installation environments outside these conditions are not recommended.

### MAINTENANCE:

- The supply must be isolated before opening or accessing the luminaire. Product maintenance is IMPORTANT and is critical to the products designed performance. The product is to be maintained in accordance with the manufacturer's instructions. For the latest product maintenance guides please go to relevant brand web site. Pierlite is not responsible for any product not maintained in accordance with the recommended procedure or intervals.
- Lamps (where provided):** The product is designed with the supplied (LEDs) / LAMP/s and it is strongly recommended that any LAMP / (LEDs) changes (if any) be made in accordance with the type, colour and brand supplied. For recommended LAMP / LED maintenance or operating guides (inclusive of recommended product switch cycles and mandatory run-in procedures for HID and Fluorescent lamps when used with dimming circuits), Pierlite recommends the application of the lamp manufacturer's operating guidelines, which can be found on manufacturer's website. Pierlite is not responsible for the product performance of alternative lamp/s used. As a member of FluroCycle, we encourage recycling of lamps and components.
- Battery (where provided):** The battery is designed with a rated average battery design life in standby mode, and is supported with a standard warranty (refer to product specifications for details); conditional of the product being maintained and operated in accordance with the manufacturer's guidelines and tested in accordance with AS/NZS2293. For guidelines see product installation instructions or visit the relevant brand web site.
- For products supplied with glass visors or covers,** do not operate the product with a damaged visor or cover; it is recommended the product be turned off, area surrounding the product vacated, and the damaged glass replaced by a professional installer immediately.
- Cables or chords,** If Any external cable or cord of the X or Y type luminaire is damaged, it shall be replaced by a qualified person or manufactures service agent.

For Z type attachments to luminaire, cord cannot be replaced if damaged, the luminaire shall be removed from service.

#### Flex cord types.

- X: A specially prepared flexible cable or cord, may also include a part of the luminaire and only available from manufacture.
- Y: Attachment may be used either with ordinary or special flexible cable or cord.
- Z: Attachment of cable or cord that cannot be replaced without damage to luminaire

**WARRANTY INSTRUCTIONS:** For the purpose of warranty claims (if any) the following instructions apply:

**Warranty period** - The above components are provided with a warranty (refer to product specifications for details) against manufacturing defects or failure to perform to specifications for products installed by an authorised installer in accordance with the manufacturer's installation instructions and which have not been subject to incorrect operation or maintenance, unauthorised modification or damage arising from any intervening cause.

**Warranty reference** - The warranty reference date commences from the date of purchase.

**Warranty point of contact** – Pierlite, 96 Gow Street Padstow NSW 2211, phone T 1300 799 300 contact – Pierlite After Sales Support.

**Warranty claim procedure** – For the purpose of making a claim the customer must:

- Contact the "point of contact" above and upon provision of proof of purchase the customer will receive a goods return advice (GRA) number.
- At the customer's expense, collect and return the goods to the "point of contact" with the issued GRA number.



3. Upon receipt of the goods, Pierlite will review the claim and if found to be accepted, Pierlite will return a replacement product to the customer to install at the customer's expense. Alternatively, if the claim is rejected, the customer may request the return of the goods at their expense.

**Consumer Contracts** – The benefits to the customer given by the Pierlite warranty are in addition to other rights and remedies of the customer if the goods are the subject of a Consumer Contract under the Australian Consumer Law. In that event the following statement is required to be brought to the Consumer's attention: - *Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.*

**Limitation of Liability** – if the goods are not purchased by the customer under a Consumer Contract within the Australian Consumer Law then but not otherwise;- (a) the Company is not liable in tort for any loss or damage suffered by the customer or by any third party; and (b) in no circumstances is Pierlite liable to the customer or to any third party for any loss of profits, loss of anticipated savings, economic loss or interruption of business or for any indirect or consequential loss (Consequential Loss).

**Terms of Sale** – these warranty provisions are in substitution for any inconsistent provisions in the Pierlite Terms and Conditions of Sale in so far as they apply to the warranty components.