

# C350

Low profile, high performance LED canopy luminaire

## Specification

- Energy efficient LED canopy luminaire
- 156W total system wattage with an impressive LER of 86lm/w
- CCT 4000K @ CRI 80 & CCT 5700K @ CRI 70
- High efficiency reflector system maximising performance while minimising glare
- Chromate treated die-cast aluminium body, powder coated white or black
- IP65 rated LED chamber and thermally isolated driver chamber driver housing
- 4mm tempered glass
- Low profile design
- Dimming available on request
- Recessed, surface & spigot mount versions available
- Spigot mount 32mm OD x 100mm

## Product Codes

Code	Version	Dim (mm)	Mass (kg)
C350R150SE75W	150W 5700K Rec. Symm WH	468 x 468 x 101	6
C350R150SE84W	150W 4000K Rec. Symm WH	468 x 468 x 101	6
C350S150SE75W	150W 5700K S/Mt Symm WH	350 x 350 x 125	6
C350S150SE84W	150W 4000K S/Mt Symm WH	350 x 350 x 125	6



## Quick Specification

Pierlite C350 150W IP65 LED in recessed or surface mount for under canopy illumination. Comes with 4mm tempered glass, powdercoated alloy body and LER > 86 lm/w

## Design Application


For illuminating service station driveways and retail plazas. Perimeter lighting around commercial and civic buildings. Cold room applications

## Performance

Horizontal Illuminance  $\leq 0^\circ$


H (m)	$E_{max}$ (lux)
4.0	273
6.0	121
8.0	68

M.F.= 1.0

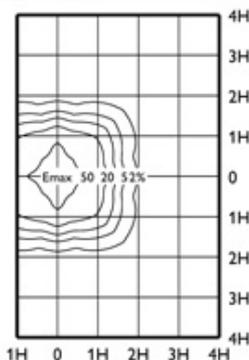

## Canopy C350R150SE74 1xLED LG ceramic/740

Polar intensity diagram

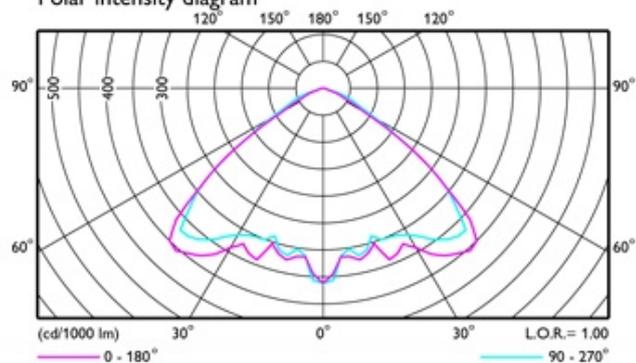

IP65



Max Dim (mm)  
468x468x101



PDF Prepared: 20.01.2017 12:01pm, Last page update: Apr 2014



**PIERLITE**  
professional lighting solutions