

**INSTALLATION / WARRANTY INSTRUCTIONS**

**DELUXE LED BATTEN ~ DBLED/2, DBLED/2/WG, DBLED/4, DBLED/4/WG**

PLEASE READ OUR ATTACHED INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR MAINTAINING THIS EQUIPMENT. THE PRODUCT IS DESIGNED FOR INSTALLATION AND MAINTENANCE IN ACCORDANCE WITH RELEVANT AUSTRALIA STANDARDS (AS/NZS3000), THE INSTRUCTIONS AND LOCAL REGULATIONS (WHERE APPLICABLE), BY AN AUTHORISED AND LICENCED ELCTRICIAN.

THE INSTALLATION INSTRUCTIONS WERE CORRECT AT THE TIME OF PRINT. TO REFLECT CHANGES IN TECHNOLOGY AND AUSTRALIAN STANDARDS; GERARD PROFESSIONAL SOLUTIONS RESERVES THE RIGHT TO AMEND THE INSTRUCTIONS WITHOUT NOTICE, UPDATED GUIDELINES CAN BE FOUND ON THE BRAND WEB SITE [www.pierlite.com.au](http://www.pierlite.com.au) .

**IMPORTANT** – THE PRODUCT MUST BE MAINTAINED AND OPERATED IN ACCORDANCE WITH THE MANUFACTURER’S INSTRUCTIONS, FAILURE TO DO SO MAY DAMAGE THE PRODUCT AND SERVICES. IT IS STRONGLY RECOMMENDED THAT THIS IMPORTANT NOTE BE COMMUNICATED TO THE OWNER AND OR OPERATOR OF THE INSTALLATION AT THE TIME OF SITE COMMISSIONING. FOR THE LATEST PRODUCT MAINTENANCE GUIDES PLEASE REFER TO [www.pierlite.com](http://www.pierlite.com). GERARD PROFESSIONAL SOLUTIONS IS NOT RESPONSIBLE FOR ANY PRODUCT NOT MAINTAINED IN ACCORDANCE WITH THE RECOMMENDED LAMP/LED MAINTENANCE GUIDELINES, PLEASE REFER TO THE LAMPS INSTALLATION GUIDELINES SUPPLIED WITH THE LAMP PRODUCT OR THE NOMINATED LAMP MANUFACTURERS WEBSITE.



**DELUXE LED BATTEN**



1. PRODUCT SPECIFICATION:	Deluxe 20W	Deluxe 40W
Type of Protection	- Class I	- Class I
IP Rating	- IP20	- IP20
Nominal Voltage	- 240V	- 240V
Circuit wattage	- 20W	- 40W
Line current	- 0.09A	- .0175 A

Important – when installing electronic or HID lighting equipment, the installer must consider the in-rush start current (if any) as documented on the control gear identification label when selecting appropriate circuit controls or protective devices.

Power factor	- 0.9	- 0.9
Nominal Freq. (Hz)	- 50 Hz	- 50 Hz
Rated Maximum Ambient Temperature	- 25°C	- 40°C
Suitable for direct mounting on flammable surfaces	- YES	- YES
Dimmable (if relevant refer <a href="http://www.pierlite.com">www.pierlite.com</a> for approved list)	- NO	- NO
Installation orientation	- Interior, horizontal surface mount	
Designed application	- Residential & Commercial	

1. **PRODUCT ELECTRICAL SPECIFICATION:** - Please refer to the product rating label
2. **APPROVALS:** The EMC compliance marking of this product applies to AS/NZS CISPR15:2006 “Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment”. This product is designed to conform to AS/NZS60598 “Luminaires, general requirements and tests”.
3. **STORAGE:** Luminaires are to be stored in cool and dry conditions.
4. **APPLICATION:** The installation application and orientation of the product is designed in accordance with the nominated product IP rating, class designation and the attached installation instructions. Installation environments outside these conditions are not recommended.

5. **INSTALLATION & DIMMING:** Installation of the product is to be completed by an authorized and licenced electrician, in accordance with these instructions, the installation instructions, relevant Australian standards and local regulations (where applicable) **For electronic control gear equipment (when supplied) DO NOT MEGGER between A and N.** All cable terminations must be installed in accordance with the designated IP rating of the product. For Dimming purpose, please see [www.pierlite.com](http://www.pierlite.com) for the dimming compatibility chart. Amalgam compact fluorescent lamps are recommended for all models 32w and above except when used with non-maintained emergency and presence detection luminaires. The minimum clearance of 25mm around the downlight and 100mm above from insulation or combustible material is required in conjunction with AS/NZS3000:2007. Insulation or combustible material shall not make contact with the luminaire or control gear.
6. **LAMPS:** The products (excluding LED) are designed with supplied lamp/s and it is strongly recommended that any lamp changes are made in accordance with the type, colour and brand supplied. Gerard Professional Solutions is not responsible for the product performance of alternative lamp/s used.

**MAINTENANCE:** The supply must be isolated before opening and accessing the luminaire. Product maintenance is IMPORTANT and critical to the products designed performance. The product is to be maintained in accordance with the manufacturer's instructions supplied with the product. For latest product maintenance guides, please see [www.pierlite.com](http://www.pierlite.com). Gerard Professional Solutions is not responsible for any product not maintained in accordance with the recommended procedure or intervals. For recommended LAMP maintenance guides, please refer to the lamp installation guidelines supplied with the lamp product or the nominated lamp manufacturer's website. For products supplied with glass visors or covers, do not operate the product with a damaged visor or cover; it is recommended the product be turned off, area surrounding the product vacated and the damaged glass replaced by a professional installer immediately.

**WARRANTY INSTRUCTIONS:** For the purpose of warranty claims (if any) the following instructions apply:

**Warranty period** – The above components are provided with a warranty of five (5) years against manufacturing defects or failure to perform to specifications for products installed by an authorised installer in accordance with the manufacturer's installation instructions and which have not been subject to incorrect operations or maintenance, unauthorised modification or damage arising from any intervening cause.

**Warranty reference** – The warranty reference date commences from the date of purchase.

**Warranty point of contact** – Gerard Professional Solutions Pty Ltd, 96 Gow Street, Padstow, NSW 2211, phone 1300 799 300, fax 1300 732 808, contact – Gerard Professional Solutions After Sales Support

**Warranty claim procedure** – For the purposes of making a claim the customer must:

1. Contact the "point of contact" above and upon provision of proof of purchase, the customer will receive a goods return advice (GRA) number.
2. At the customers expense, collect and return the goods to the "point of contact" with the issued GRA number.
3. Upon receipt of the goods, Gerard Professional Solutions will review the claim and if found to be accepted, Gerard Professional Solutions will return a replacement product to the customer to install at the customers expense. Alternatively if the claim is rejected, the customer may request the return of the goods at their expense.

**Consumer Contracts** – The benefits to the customer given by Gerard Professional Solutions warranty are in addition to other rights and remedies of the customer if the goods are the subject of a Consumer Contract under the Australian Consumer Law. In that event the following statement is required to be brought to the Consumer's attention:-  
*Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.*


**Limitation of Liability** – if the goods are not purchased by the customer under the Consumer Contract within the Australian Consumer Law then but not otherwise:-

4. The Company is not liable in tort for any loss or damage suffered by the customer or by any third party; and b) In no circumstances is Gerard Professional Solutions liable to the customer or to any third party for any loss of profits, loss of anticipated savings, economic loss or interruption of business or for any indirect or consequential loss (Consequential Loss)


Terms of Sales – these Warranty provisions are in substitution for any inconsistent provisions in the Gerard Professional Solutions Terms and Conditions of Sale in so far as they apply to the Warranty components.

**BATTEN LIGHT INSTRUCTION**


1, Open 2 end caps by using flat screwdriver.

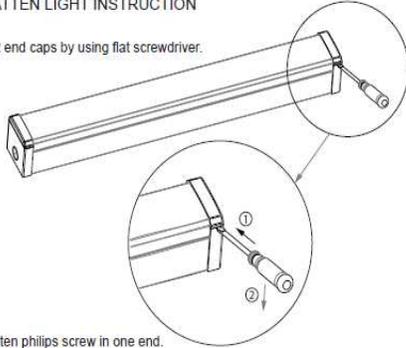


2, Un-tighten philips screw in one end.

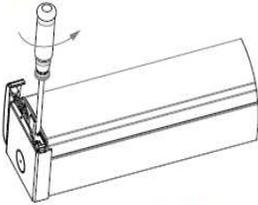


3, Use flat screwdriver to release LED Module,

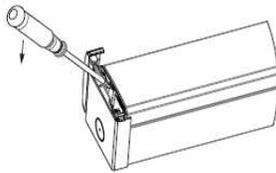


4, Take out LED Module & disconnect LED Module power cable.

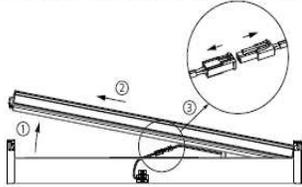

5, Connect wires.

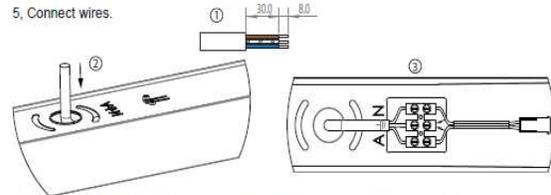


6, Re-connect LED Module power cable, Ensure arrow symbols are in same direction. Slide the metal tongue into the slot.

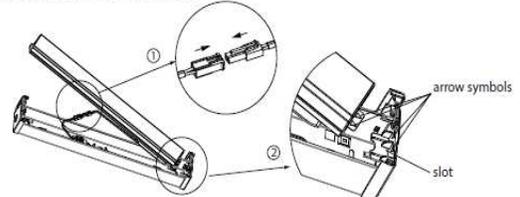


7, Push the other end of LED Module to the metal housing until hearing click sound.



8, Tighten philips screw.



9, Close the end cap.




STEP 1: Align Wireguard bracket and body, then push Wireguard bracket into body.





STEP 2: Slide Wireguard Bracket toward Body end.




STEP 3: Use blade screw driver to push Wireguard Bracket into the correct place.

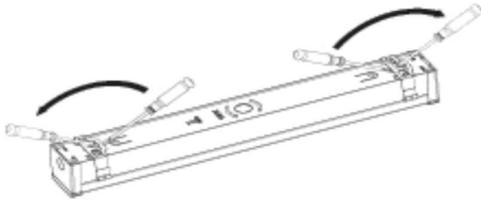


STEP 4: Wireguard Bracket auto-locked

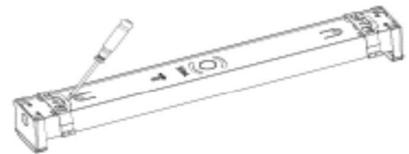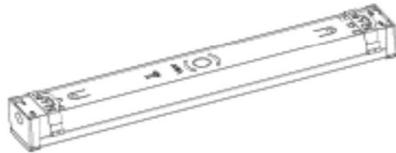

STEP 5: Align Wireguard and Bracket



STEP 6: Hang one side to Bracket, then rotate to hang another side.



STEP 7: Batten light with Wireguard

