

# Huntsman®

Compact, stylish and dimmable IP66 24W 1950Lm LED mini Floodlight, die cast aluminium heatsink and integrated driver

## Specification

- IP66 24W 4100K, 1950Lm
- Dimmable via approved trailing edge dimmers.
- Impressive 3 year warranty 35,000 hours rated LED life (L70)
- IK10 impact rating
- Satin black finish, die-cast aluminium heatsink, flame retardant polycarbonate body constant current integral driver and mounting trunnion
- Efficient heatsink design, safe to touch housing temperature
- 3mm tempered glass front and precision reflector system allowing 40 degree vertical and 70 degrees horizontal distribution
- Durable outdoor finish adjustable bracket 261 degree tilt rotation
- Hydrophobic membrane vent offering water, dust ingress and a reduced condensation build up
- Electrophoresis coated and powder coated for extra durability

## Product Codes

Code	Version	Dim (mm)	Mass (kg)
HUNTSMANBK	24W dimmable LED 1950Lm Black	96 x 123	1.0



## Quick Specification


Pierlite safe to touch housing temperature, IP66 24W dimmable LED floodlight, 3mm tempered glass front.

## Design Application

Ideal for residential, entrance and security spaces, BBQ areas, entertaining spaces

## Performance

Polar intensity diagram

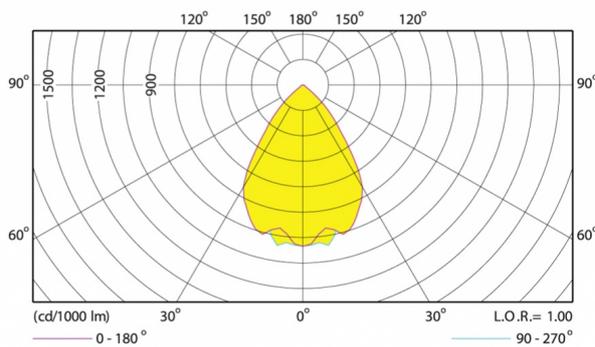

PH2641\_3s

## HUNTSMANBK 1x10 LED Lumileds Rebel ES/641


L.O.R.=1.00

1 x 1640 lm

Horizontal Illuminance  $\leq 60^\circ$

H (m)	E <sub>max</sub> (lux)
2.0	117
3.0	52
5.0	19

M.F.= 1.0

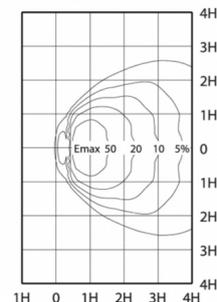

2012-05-17

IP66



Max Dim (mm)  
96 x 123



PDF Prepared: 07.06.2017 14:06pm, Last page update: Dec 2016

