

# Hang 5

Is a robust high performance solution offering energy saving T5 technology.

## Specification

- 28W and 54W 4000K T5 Technology
- Integral electronic control gear
- Energy efficient high performance
- Available in twin, four and six lamp configurations
- Optional gripple wire suspensions available
- Standard white, available in black and charcoal grey on request
- Complete with 1.5 metre flex and plug
- Wireguards and diffuser kits are not available for this system

## Product Codes

Code	Version	Dim (mm)	Mass (kg)
HANG5228E4	2 x 28W 4K c/w reflect, 840 lamps	1171 x 123 x 71	6.0
HANG5428E4	4 x 28W 4K c/w reflect, 840 lamps	1171 x 245 x 71	8.0
HANG5454E4	4 x 54W 4K c/w reflect, 840 lamps	1171 x 245 x 71	8.0
HANG5628E4	6 x 28W 4K c/w reflect, 840 lamps	1171 x 365 x 71	12.0
HANG5654E4	6 x 54W 4K c/w reflect, 840 lamps	1171 x 365 x 71	12.0

### Accessories

99005236	Wire Suspension 4m Y (2 per fitting)
----------	--------------------------------------



## Quick Specification

Pierlite sheet steel, high performance reflectors T5 technology, integral electronic gear, white housing and 1.5 mtr flex & plug.


## Design Application

Ideal for multi-purpose halls, warehouses, high ceiling spaces, distribution centres and retail spaces

## Performance

### HANG5454 4xT5 54W/840 N

4 x 4450 lm

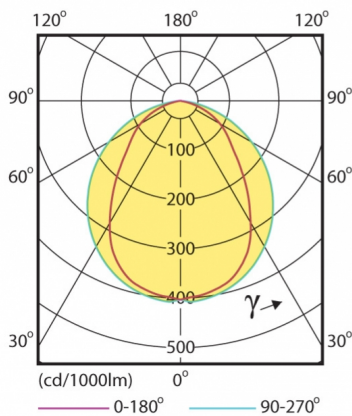

Light output ratio 0.90  
Service upward 0.00  
Service downward 0.90

CIE flux code 56 86 98 100 90

SHR NOM (square) 1.25  
SHR MAX (square) 1.29  
SHR MAX (continuous) 1.42  
UGRcen (4Hx8H, 0.25H) 26  
UTE71-121: 0.90D + 0.00T

PH2603\_4

Reflectances			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	56	65	71	76	82	86	89	92	94
0.70	0.30	0.20	50	59	65	70	77	81	85	89	92
0.70	0.10	0.20	45	54	61	66	73	78	81	86	89
0.50	0.50	0.20	55	63	69	73	79	83	85	89	91
0.50	0.30	0.20	49	58	64	69	75	79	82	86	88
0.50	0.10	0.20	45	54	60	65	71	76	79	84	86
0.30	0.50	0.20	54	62	67	71	76	80	82	85	87
0.30	0.30	0.20	48	57	63	67	73	77	80	83	85
0.30	0.10	0.20	45	53	59	64	70	74	77	81	84
0.00	0.00	0.00	43	51	57	61	67	71	74	77	80

Ceiling mounted

IP20



Max Dim (mm)  
1171 x 365 x 71

PDF Prepared: 23.01.2017 08:01am, Last page update: Nov 2014

