



LOW PROFILE DIMMABLE DOWNLIGHT

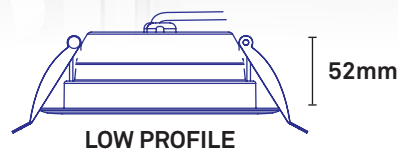

LITELUX LED DOWNLIGHT

Litelux LED diffused downlight is now available in recessed and flush lens style. This high performing dimmable downlight features excellent thermal performance and allows for easy single handed installation. Complies with the highest luminaire classification IC-4 and tested to the latest AS/NZS6058.2.2 2016 Standard.

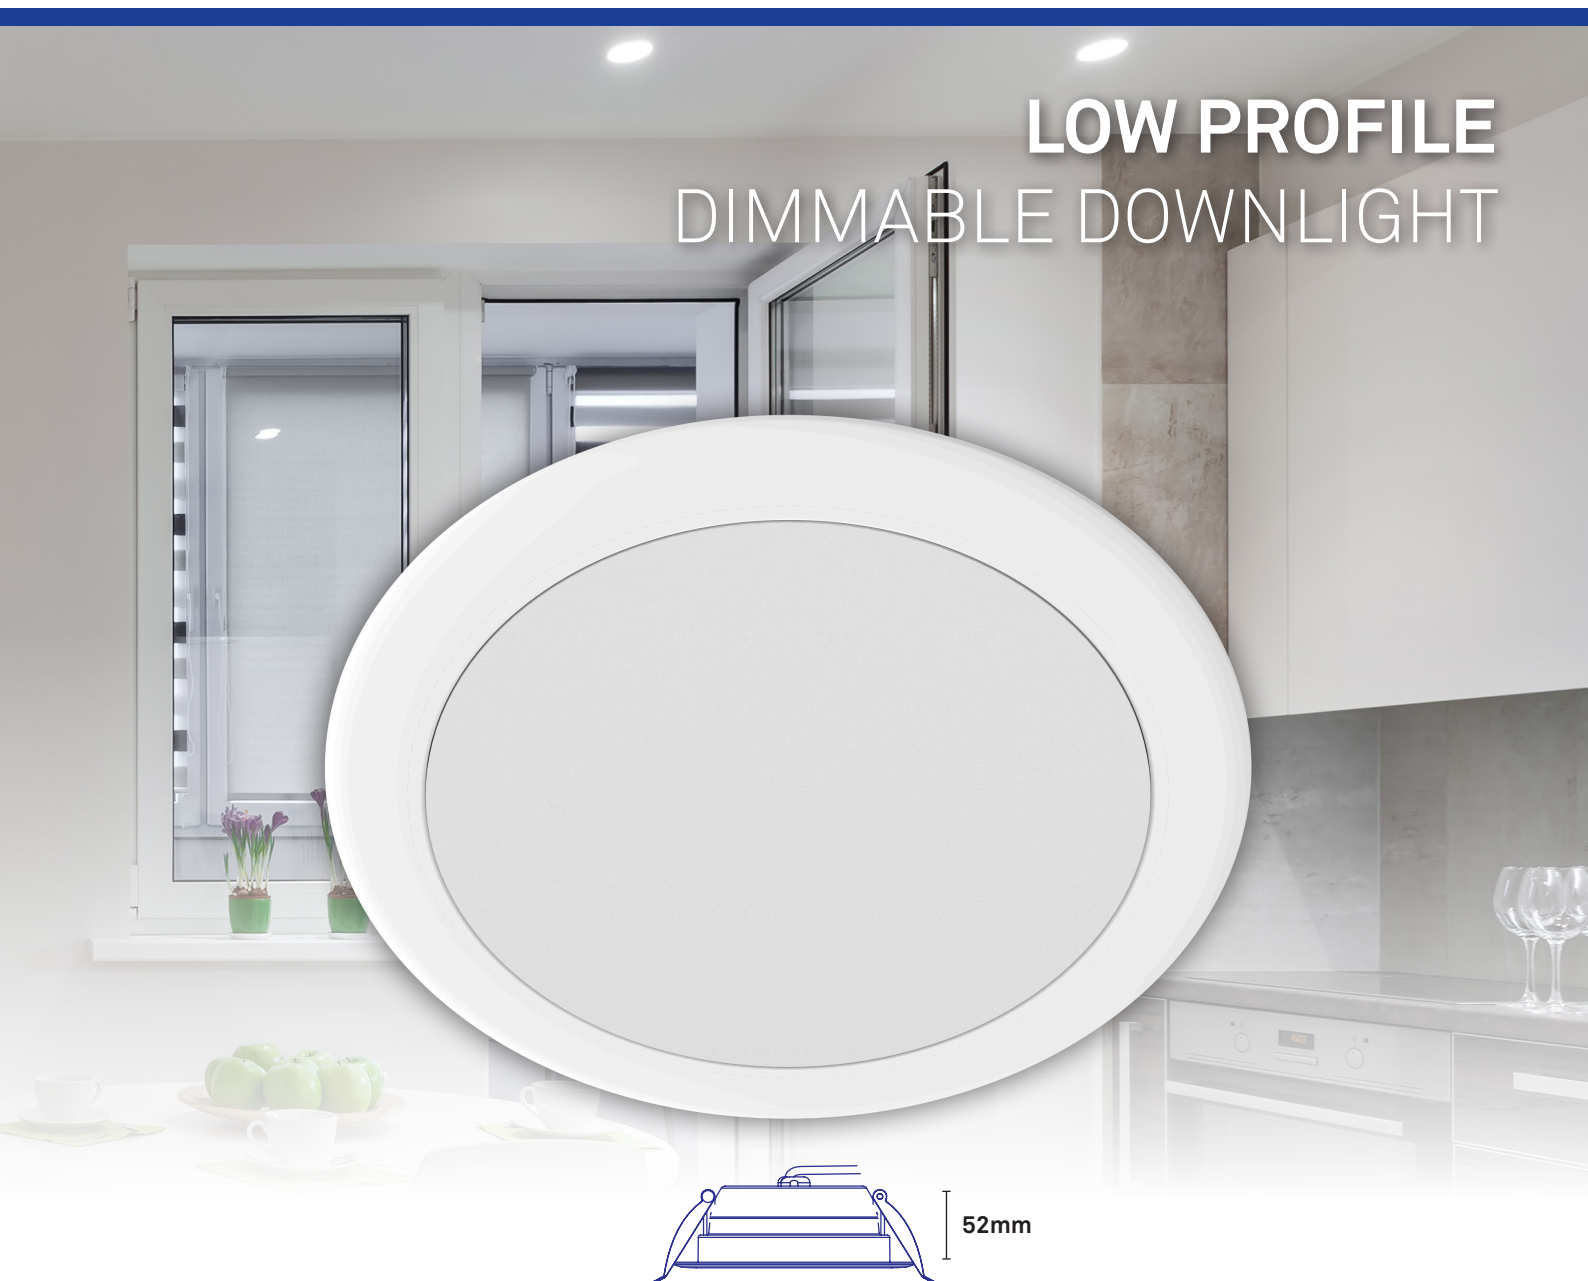

LITELUX LED DOWNLIGHT

Cost effective, high performance, low profile, dimmable downlight with slim remote driver. Ergonomically designed wide blade solid retaining springs perfectly balanced to allow single handed install. Available now in recessed and flush styled lens.

FEATURES

- Complies to the highest rating IC-4
- Low profile aluminium housing for strength and shallow form designed for maximum heat dissipation, to ensure long life
- Complete with 1.2m flex and plug
- White finish
- Available in both flush and recessed satin diffused front lens, soft appearance
- Easy to install clips
- IP6X from above/IP65 from below*
- 35,000 hours L70, LLMF*
- Remote dimmable LED Driver
- 3-year warranty

BENEFITS


- Ergonomically designed wide blade solid springs perfectly balanced to allow single handed install
- Low profile in the ceiling with remote driver (max 40mm depth for flush lens, 52mm for recessed lens)
- Available in three colour options 3000K, 800lm; 4000K, 840lm; 6500K, 860lm

SPECIFICATIONS


- Tested to new AS/NZS6058.2.2 2016 standards
- Complies with the highest rating IC-4, which permits use when covered
- Ambient Temperature: Ta40°C
- Colour Rendering Index: CRI >80
- Ingress Protection: IP65 when installed from below
- Dimmable**
- Impact Resistance: IK09

APPLICATIONS

Residential and apartment interior space

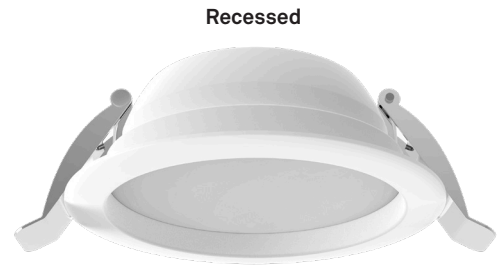


Recessed

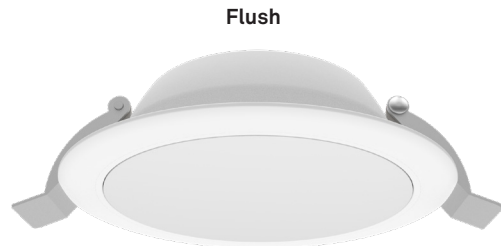

Flush



Low Profile

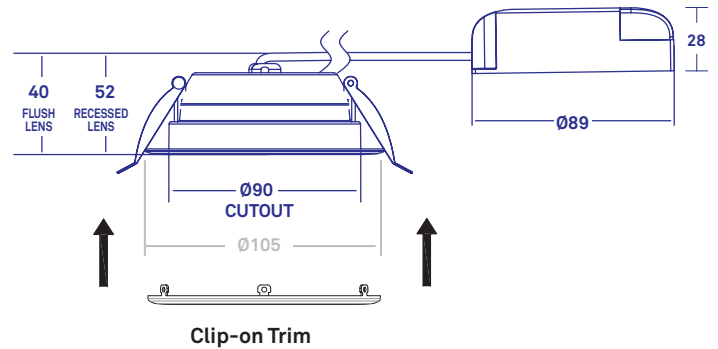







Clip-on Trim

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLOUR TEMP	DIMMENSION (MM)	CUT OUT (MM)	MASS (KG)	DIMMABLE
FLUSH LENS								
DLP53K/W	Flush Diffused, White	11W	800lm	3000K	Ø105 x H 40mm	Ø90mm	0.25	Yes
DLP54K/W	Flush Diffused, White	11W	840lm	4000K	Ø105 x H 40mm	Ø90mm	0.25	Yes
DLP56K/W	Flush Diffused, White	11W	860lm	6500K	Ø105 x H 40mm	Ø90mm	0.25	Yes
RECESSED LENS								
DLP53KR/W	Recessed Diffused, White	10W	800lm	3000K	Ø105 x H 52mm	Ø90mm	0.25	Yes
DLP54KR/W	Recessed Diffused, White	10W	840lm	4000K	Ø105 x H 52mm	Ø90mm	0.25	Yes
DLP56KR/W	Recessed Diffused, White	10W	860lm	6500K	Ø105 x H 52mm	Ø90mm	0.25	Yes

LITELUX LED DOWNLIGHT

OPTIONAL ACCESSORIES

PRODUCT CODE	DESCRIPTION	
FLUSH LENS		
DLPTRMFS	Clip-on silver trim for flush lens Litelux downlights	
DLPTRMFB	Clip-on black trim for flush lens Litelux downlights	
DLPTRMFBC	Clip-on brushed chrome trim for flush lens Litelux downlights	
RECESSED LENS		
DLPTRMRS	Clip-on silver trim for recessed lens Litelux downlights	
DLPTRMRB	Clip-on black trim for recessed lens Litelux downlights	
DLPTRMRBC	Clip-on brushed chrome trim for recessed lens Litelux downlights	



*Lamp lumen maintenance factor (LLMF). Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply. ** Dimming performance may vary depending on the specifications of the dimmer being used. For best performance we recommend Diginet LEDsmart+ range.

