

LED Blade Exit

Stylish, energy efficient LED exit luminaire compliant to Australian emergency lighting standards AS/NZS2293.

Specification

- Strip multiple LED lamps
- Polycarbonate housing
- Slimline acrylic legend blade
- Fully approved to AS/NZS2293 thermal & illuminance requirements
- Pictogram viewing distance is 24m
- Surface & Recessed mount, Swivel action of panel for use on angled ceilings
- Low power consumption
- A complete 'one box' solution including body diffuser and all pictogram inserts
- Optional black 'theatre' body housing and picto inserts
- Optional DALI monitored systems available

Product Codes

Code	Version
LEDXM2P	c/w Pictogram Inserts
LEDXM2PB	Black body & Green/Black Theatre Pictogram
Accessories	
WGCE	Ceiling Mount Wire Guard
WGWE	Wall Mount Wire Guard
SKITLED	Wire Susp. Kit (Contractor to Supply Wire)
EXCB	Cantilever Bracket
LEDCM	Conduit Mount Box
LEDRB	Recess. Bracket (cut-out: 380x88mm)
99023330	Rod Suspension White



Quick Specification

Pierlite strip multiple LED lamps, Polycarbonate housing, Slimline acrylic legend blade, Fully approved to AS/NZS2293. A complete 'one box' solution including body diffuser and all pictogram inserts

Design Application


Ideal for emergency lighting application where aesthetics are everything, commercial office areas, hotels, shopping and cinema complexes, apartments, hospitals.

Performance

Product Code	Classification	Mounting Height in Metres					
		2.1	2.4	2.7	3	3.6	
LEDXM2P	C0	D1.25	4	3.8	3.4	2.9	2
	C90	D1.25	4	3.8	3.4	2.9	2



All pictogram inserts

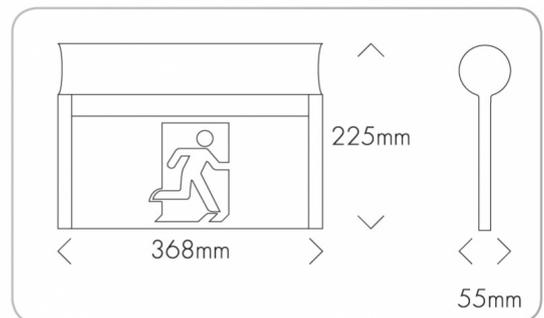

IP20



Max Dim (mm)
368 x 55 x 255

PDF Prepared: 04.02.2017 16:02pm, Last page update: Aug 2014

