



Pierlux ECO LED Oyster

The easy to install economical lighting solution

The Pierlux ECO LED Oyster is an acrylic opal luminaire that combines style with value for money. Available in two sizes with 3 colour options 3000K, 4000K and 6500K.



Pierlux ECO LED Oyster

Pierlux ECO LED Oyster is a perfect lighting solution for illuminating any area and easy to install. This low profile acrylic opal luminaire is designed in two wattage sizes and 3 colour temperature options so there is a product for every application.

Features



- Available in two sizes
- 3 colour options 3000K, 4000K and 6500K
- ECO LED Oyster 20W – 310mm diameter
- ECO LED Oyster 28W – 420mm diameter
- White steel base oyster
- Twist and lock diffuser
- Encapsulated LED's
- Removable trim to enhance the appearance
- IP54 with trim or IP40 without trim
- Low glare acrylic diffuser
- Ta40
- Non-Dimmable

Benefits

- Excellent and even light distribution
- IP54 Rating reduces foreign bodies entering the unit, increases weatherproof rating for use in damp locations
- Energy efficient
- Easy to install
- 2 wattages in 3 colour options available for more flexibility

Key Applications

Commercial, retail and residential application. Suitable for indoor and outdoor use.

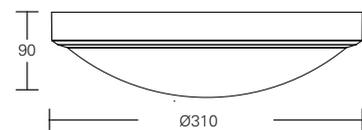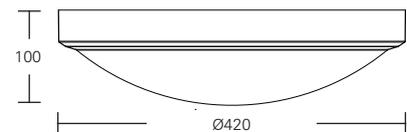

Product Code	Description	Wattage	Lumen	Colour Temp	Dimensions (mm)	Mass (Kg)	Dimmable
ECOOYS20W3K	ECO Oyster 20W 3000K	20W	1500 Lm	3000K	Ø310 x 90	0.7	No
ECOOYS20W4K	ECO Oyster 20W 4000K	20W	1600 Lm	4000K	Ø310 x 90	0.7	No
ECOOYS20W6.5K	ECO Oyster 20W 6500K	20W	1600 Lm	6500K	Ø310 x 90	0.7	No
ECOOYS28W3K	ECO Oyster 28W 3000K	28W	2000 Lm	3000K	Ø420 x 100	1.4	No
ECOOYS28W4K	ECO Oyster 28W 4000K	28W	2100 Lm	4000K	Ø420 x 100	1.4	No
ECOOYS28W6.5K	ECO Oyster 28W 6500K	28W	2100 Lm	6500K	Ø420 x 100	1.4	No

Issue: May 2016



*Rated average design life is in accordance with IEC standards. Actual product life may very dependent upon frequency of maintenance and product application.