

Astro LED Highbay

High performance LED highbay with a narrow and wide beam choice.

Specification

- 50,000 hour average rated life at L70
- Two formats available narrow and wide beam up to 26,700lms
- LER > 100lm/w
- CCT = 4000K CRI>70
- Optical performance achieved via individual LED reflectors with a 4mm tempered glass
- Body manufactured from die cast aluminium with integrated cooling fins
- Integral driver, with standard 1-10v dimming
- Thermal management system for optimum LED performance
- IP66 rating
- Supplied with suspension hook



Product Codes

Code	Version	Dim (mm)	Mass (kg)
330083-00	133W 4000K N/Beam Graphite	512 x 100	11.2
330084-00	201W 4000K N/Beam Graphite	512 x 100	11.35
330085-00	264W 4000K N/Beam Graphite	512 x 100	11.5
330093-00	133W 4000K W/Beam Graphite	512 x 100	11.2
330094-00	201W 4000K W/Beam Graphite	512 x 100	11.35
330095-00	264W 4000K W/Beam Graphite	512 x 100	11.5

Quick Specification


Pierlite Astro LED Highbay in either narrow or wide beam distribution, up to 264W with an LER of > 100lm/w.

Design Application

System is designed for high ceiling industrial spaces, distribution centres, retail areas, car showrooms and storage areas

Performance

Astro LED Narrow Beam 264W 1 x LED / 4000

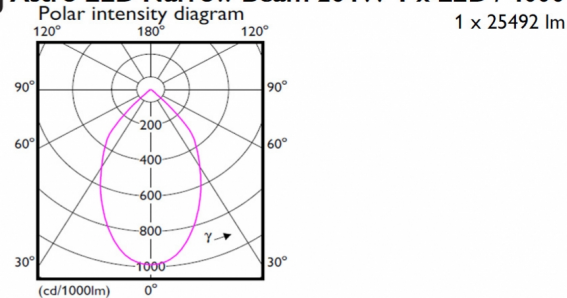


Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 89 99 100 100 100

UGRc_{en} (4Hx8H, 0.25H) 23

Astro LED Wide Beam 264W 1 x LED / 4000

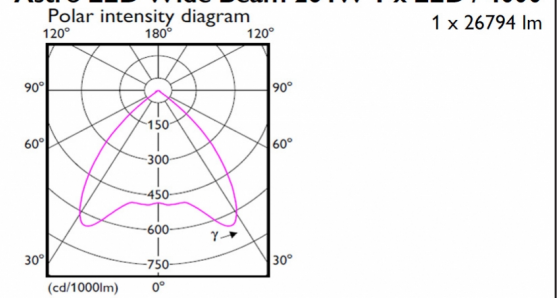

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 83 99 100 100 100

UGRc_{en} (4Hx8H, 0.25H) 24

IP66



Max Dim (mm)
Dia 512mm

PDF Prepared: 20.01.2017 12:01pm, Last page update: Jan 2016



PIERLITE
professional lighting solutions