



## Pierlite Deluxe LED Batten

The quick fit LED batten with emergency option

The Pierlite Deluxe LED Batten has just got better. This 'quick fit' product now comes with emergency and DALI dimmable options.





## Pierlite Deluxe LED Batten

The Pierlite Deluxe LED Batten has been designed with the installer in mind. The quick to install one piece LED module is easily removed by simply unclipping the captive end caps and unplugging the internal flying lead.

The wire guard option offers good impact resistance, IK09. The opal diffuser has been specifically designed to offer the best light output whilst ensuring excellent uniformity.

### Features

- 20w or 40w, IP20, CRI > 80.
- Textured opal diffuser, allowing an even distribution of light output.
- 20mm knockouts for conduit or cable glands.
- Easy to install with un-pluggable LED module and captive end caps.
- Insect proof sealed LED module.
- The wide body allows covering up of conventional batten fixing points.
- In built wire suspension capability.
- End to end mounting possible.
- Wire guard option available.
- IK06 standard, IK09 wire guard option.
- DALI Dim and DALI Rapix options.

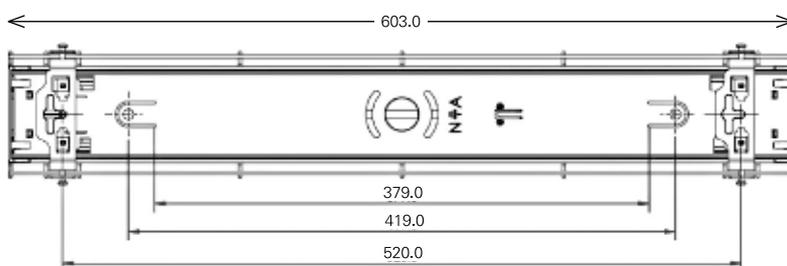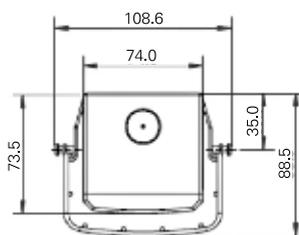

### Benefits

- Energy efficient.
- Easy to install, saves time.
- Complete solution.

### Key Applications

Commercial spaces, warehouses and general emergency lighting.

Product Code	Description	Wattage	Lumens	Dimension	Mass (Kg)	Dimmable	Classification
<b>DBLED Standard Products</b>							
DBLED/2	20w LED Batten 4000K	20w	1950	603 x 74 x 74	0.94	No	
DBLED/2/WG	20w LED Batten 4000K c/w wireguard	20w	1950	603 x 74 x 74	1.19	No	
DBLED/4	40w LED Batten 4000K	40w	3960	1164 x 74 x 74	1.71	No	
DBLED/4/WG	40w LED Batten 4000K c/w wireguard	40w	3960	1164 x 74 x 74	2.16	No	
<b>DBLED DALI DIM Products</b>							
DBLED/2A4	DBLED/2 Batten 4000K DALI Dim	20w	2050	603 x 74 x 74	0.94	DALI	
DBLED/4A4	DBLED/4 Batten 4000K DALI Dim	40w	4050	1164 x 74 x 74	1.71	DALI	
<b>DBLED Emergency</b>							
DBLED/2E4SD	DBLED/2 Batten 4000K DIGINET DALI EM SUST	20w	1950/350	603 x 74 x 74	1.33	No	C0/C180 D50, C90 D25
DBLED/2A4SD	DBLED/2 Batten 4000K DALI Dim/DIGINET DALI EM SUST	20w	2050/370	603 x 74 x 74	1.33	DALI	C0/C180 D50, C90 D25
DBLED/4E4M	DBLED/4 Batten 4000K Non Dim Maintained EM	40w	3960/610	1164 x 74 x 74	2.45	No	C0/C180 D80, C90 D50
DBLED/4/4N	DBLED/4 Batten 4000K Non Maintained EM	40w	610	1164 x 74 x 74	2.29	No	C0/C180 D80, C90 D50
DBLED/4E4SD	DBLED/4 Batten 4000K Non Dim/DIGINET DALI EM SUST	40w	3960/610	1164 x 74 x 74	2.05	No	C0/C180 D50, C90 D32
DBLED/4A4SD	DBLED/4 Batten 4000K DALI Dim/DIGINET DALI EM SUST	40w	4050/620	1164 x 74 x 74	2.17	DALI	C0/C180 D50, C90 D32

### Accessories

WG2	Wire Guard 603mm
WG4	Wire Guard 1164mm



Rated average design life



Pierlite is a brand of the Gerard Lighting Group

[pierlite.com.au](http://pierlite.com.au)