

INSTALLATION / WARRANTY INSTRUCTIONS

GIGA – GIGA2000MH, GIGA2000MHN

PLEASE READ THESE INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR MAINTAINING THIS EQUIPMENT. THE PRODUCT IS DESIGNED FOR INSTALLATION AND MAINTENANCE IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS (AS/NZ3000), THESE INSTRUCTIONS AND LOCAL REGULATIONS (WHERE APPLICABLE), BY AN AUTHORISED AND LICENCED ELECTRICIAN.

THE INSTALLATION INSTRUCTIONS WERE CORRECT AT THE TIME OF PRINT. TO REFLECT CHANGES IN TECHNOLOGY AND AUSTRALIAN STANDARDS; PIERLITE AUSTRALIA RESERVES THE RIGHT TO AMEND THE INSTRUCTIONS WITHOUT NOTICE. UPDATED GUIDELINES CAN BE FOUND ON www.pierlite.com.

IMPORTANT - THE PRODUCT MUST BE MAINTAINED AND OPERATED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS, FAILURE TO DO SO MAY DAMAGE THE PRODUCT AND SERVICES. IT IS STRONGLY RECOMMENDED THAT THIS IMPORTANT NOTE BE COMMUNICATED TO THE OWNER AND OR OPERATOR OF THE INSTALLATION AT THE TIME OF SITE COMMISSIONING. GOOD PRACTICE DOES NOT RECOMMEND THE 24/7 USE OF PRODUCTS WITHOUT THE APPLICATION OF SUITABLE SWITCH CYCLE INTERVALS. PIERLITE AUSTRALIA IS NOT RESPONSIBLE FOR ANY PRODUCT NOT MAINTAINED IN ACCORDANCE WITH THE RECOMMENDED PROCEDURES.



For the latest product online reference data, simply install and activate a QR code scanner application on your smartphone. For more information visit www.pierlite.com




1. PRODUCT SPECIFICATION:

	240v	415v
Type of Protection	Class I Luminaire	Class I Luminaire
IP Rating	65	65
Nominal Voltage	240	415
Circuit wattage	2042	2072
Line current	9.5	5.6
Start Current	12.3	7.4
Nominal Freq. (Hz)	50 Hz	50 Hz
Rated Maximum Ambient Temperature	40°C	40°C
Suitable for direct mounting on flammable surfaces	No	No
Dimmable (if relevant refer www.pierlite.com for approved list)	No	No
Installation orientation	45/135	45/135
Designed application	Floodlighting	Floodlighting

VERTICAL AIMING LIMITS

For optimum thermal, optical and electrical performance the Floodlight products detailed below have defined vertical aiming limits which must be adhered to in installation. Failure to maintain these mandatory recommendations may subject the product to excessive operating conditions and such, will void the manufacturer's warranty. These measurements have been taken from the glass front.

PRODUCT	VERTICAL AIMING LIMITS
Force	45 / 135
Force 70	45 / 135
Force 250	45 / 135
Giga	45 / 135
Mini Marine	45 / 135
Mini Master	45 / 135
Maxi Master	45 / 135
Contour	45 / 135
Taurus	0
Area Master	0
Olympic	90 / 10
Stainless HID	45 / 135
Stainless TH	45 / 135
Domain 1000	0
Domain M	0

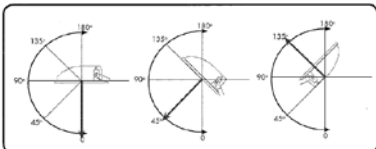

2. APPROVALS: The RCM marking of this product applies to AS/NZS CISPR15:2006 (EMC) "Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment". This product is designed to conform to AS/NZS60598 "Luminaires, general requirements and tests".



3. STORAGE: Prior to installation products are to be stored in cool and dry conditions.

4. APPLICATION: The installation application and orientation of the product is designed in accordance with the nominated product IP rating, class designation and these installation installations. Installation environments outside these conditions are not recommended.

5. INSTALLATION / GENERAL: Installation of the product is to be completed by an authorized and licenced electrician, in accordance with these instructions, relevant Australia standards and local regulations (where applicable). All cable terminations must be installed in accordance with the designated IP rating of the product. The mounting facilities provided for the transformer (if any), need only be utilized if in the application of the product is required by AS/NZS3000. **For electronic control equipment (when supplied) DO NOT MEGGER between A and N.**

6. INSTALLATION / SPECIAL CONDITIONS (relevant only for products approved for such an installation):

(a) products installed in high wind environments must have suitable installation / fastening methods applied to ensure the product's mounting points are not damaged through, corrosion, constant vibration and or movement. Exterior products are designed with precise vertical aiming limits, which should not be exceeded.

(b) products installed in corrosive or salt laden environments require special consideration and such; specific product selection, inclusive of suitable fastening methods and extensive ongoing maintenance of products installed in these environments require professional advice. It is essential that all aspects of the product selection, material specification and maintenance are specifically designed for such use.

(c) interior highbay products must be vertically suspended. The method of suspension (chain etc) must be able to support at least 5 times the total weight of the fitting. Do not install where air movement will cause the fitting to swing about, causing wear and tear of attachment points. Luminaires should be installed where access for maintenance is practical and allows for maintenance to be completed in accordance with the manufacturer's recommendations.

(d) interior (downlight) products must be installed to ensure the lamp unit or the driver are not covered with any combustible materials or insulation; minimum spacings nominated for these materials are mandatory.

7. MAINTENANCE:

(a) The supply must be isolated before opening or accessing the luminaire. Product maintenance is IMPORTANT and is critical to the products designed performance. The product is to be maintained in accordance with the manufacturer's instructions. For the latest product maintenance guides please go to www.pierlite.com. Pierlite Australia is not responsible for any product not maintained in accordance with the recommended procedure or intervals.

(b) lamps (where provided): The product is designed with the supplied (LEDs) / LAMP/s and it is strongly recommended that any LAMP / (LEDs) changes (if any) be made in accordance with the type, colour and brand supplied. For recommended LAMP / LED maintenance or operating guides (inclusive of recommended product switch cycles and mandatory run-in procedures for HID and Fluorescent lamps when used with dimming circuits), Pierlite Australia recommends the application of the lamp manufacturer's operating guidelines, which can be found on manufacturer's website. Pierlite Australia is not responsible for the product performance of alternative lamp/s used. As a member of FluroCycle, Pierlite Australia encourages recycling of lamps and components..

(c) battery (where provided): The battery is designed with a rated average battery design life of 25,000 hrs in standby mode. The battery is supported with a standard 12 month warranty; conditional of the product being maintained and operated in accordance with the manufacturer's guidelines and tested in accordance with AS/NZS2293. For guidelines see product installation instructions or visit www.pierlite.com.

(d) for products supplied with glass visors or covers, do not operate the product with a damaged visor or cover; it is recommended the product be turned off, area surrounding the product vacated and the damaged glass replaced by a professional installer immediately.

8. WARRANTY: Product warranty is in accordance with Pierlite Australia's standard terms and conditions of sales, unless specifically stated otherwise in this document. For the latest terms and conditions of sale please see www.pierlite.com.