


EQUATORE

DISPLAY LIGHTING SYSTEM

A discrete and minimal continuous lighting system designed for a myriad of retail and commercial applications. Simple male and female connection technology reduces installation time whilst creating continuous and seamless light distribution.

Concord

EQUATORE

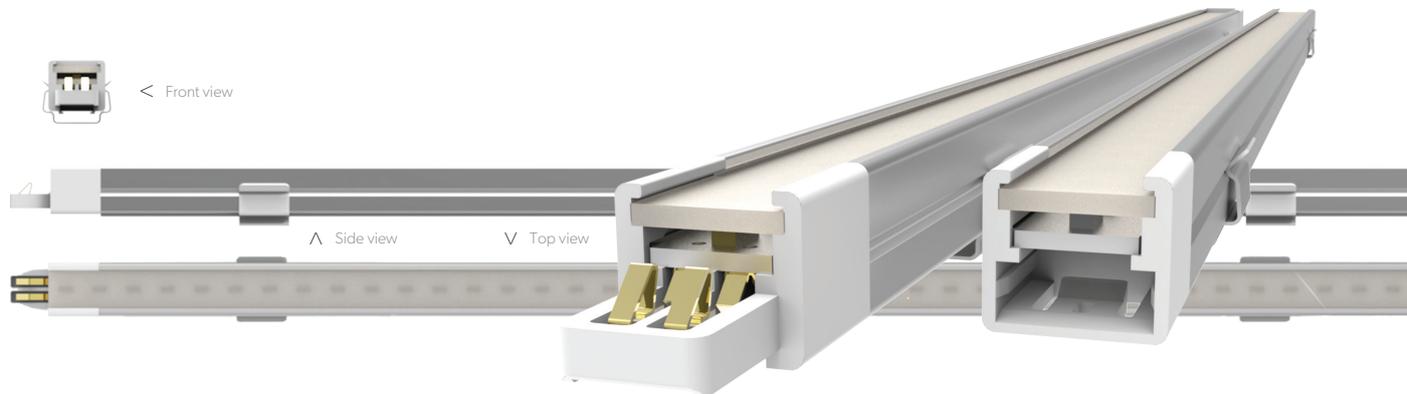

FEATURES

- Male to female linkable connection
- Small and lightweight design for applications with limited space
- Available in 5 different lengths including 100mm, 285mm, 565mm, 845mm and 1123mm
- Easy plug and play technology reduces install time and wiring
- Can be connected in various lengths to provide continuous and even light distribution

APPLICATIONS


- Shop fronts
- Cove lighting
- Display cabinets
- Shelving

SPECIFICATIONS

Colour temperature	3000K and 4000K
Lumen output	Refer to chart
CRI	80+
Macadams step	3 SDCM
Beam distribution	Symmetric
Default beam angle	Wide
Lumen maintenance	L70 50,000hrs
Control	Remote
Dimensions	H 10 x W 12 x L 109 / 294 / 574 / 853 / 1132 (overall lengths mm)
Mounting	Via magnetic bracket or surface clips
Electrical rating	Class III

FITTING WATTAGE & LENGTH

Wattage (W)	A (mm)	B (mm)
1.5	100	109
4	285	294
8	565	574
12	845	854
16	1123	1132

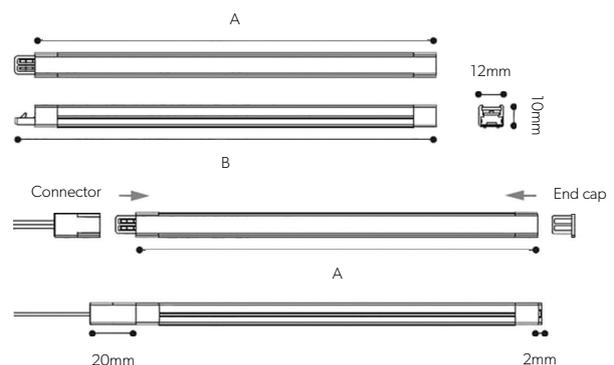

EQUATORE


TECHNICAL REQUIREMENTS

Body selection	Description	Colour Temp	Voltage Factory Default Setting	Lumen Exit	Wattage	CRI	Life / L70	Finishes
EQF100301	1.5W 100MM FLAT DIFF. 3K SIL	3000K	24V	110	1.5W	80+	50,000	Matte Silver
EQF100401	1.5W 100MM FLAT DIFF. 4K SIL	4000K	24V	135	1.5W	80+	50,000	
EQF285304	4W 285MM FLAT DIFF. 3K SIL	3000K	24V	400	4W	80+	50,000	
EQF285404	4W 285MM FLAT DIFF. 4K SIL	4000K	24V	390	4W	80+	50,000	
EQF285304S*	4W 285MM FLAT DIFF. 3K SE SIL	3000K	24V	400	4W	80+	50,000	
EQF285404S*	4W 285MM FLAT DIFF. 4K SE SIL	4000K	24V	390	4W	80+	50,000	
EQF565308	8W 565MM FLAT DIFF. 3K SIL	3000K	24V	650	8W	80+	50,000	
EQF565408	8W 565MM FLAT DIFF. 4K SIL	4000K	24V	740	8W	80+	50,000	
EQF845312	12W 845MM FLAT DIFF. 3K SIL	3000K	24V	950	12W	80+	50,000	
EQF845412	12W 845MM FLAT DIFF. 4K SIL	4000K	24V	1080	12W	80+	50,000	
EQF1123316	16W 1123MM FLAT DIFF. 3K SIL	3000K	24V	1200	16W	80+	50,000	
EQF1123416	16W 1123MM FLAT DIFF. 4K SIL	4000K	24V	1310	16W	80+	50,000	

* S = Side power entry feed in, **Maximum run wattage 55W

ACCESSORIES

EQBW150	150mm - connection cord between fixtures
EQBW600	600mm - connection cord between fixtures
EQSS	Standard metal mounting clips (complete with fitting)
EQMBKT	Magnetic mounting plate (optional, for fixing onto non-magnetic surfaces)
EQAG20	Angled mounting clip 20°
EQAG45	Angled mounting clip 45°
EQPC200	Power cord 200mm for connection between distribution box and fixture
JB06	6-way distribution box
97031299	Non-dimmable 60W driver, other dimming options on request
EQSTARTERKIT	Equatore Starter Kit C/W 97031299 driver, JB06 6-way distribution box & EQPC200 power cord

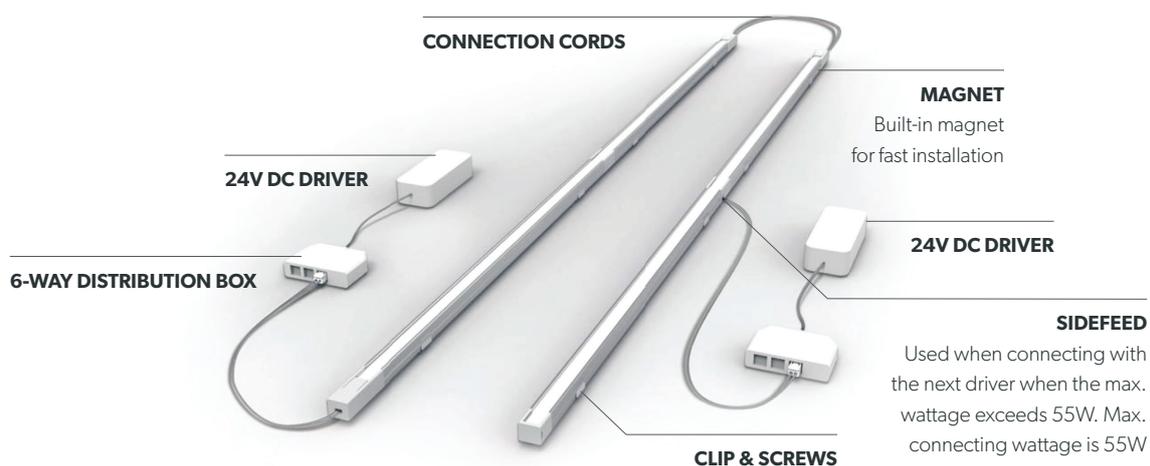



Concord

