

# TRADITIONAL STYLE CEILING & WALL MOUNTED EXIT LUMINAIRE

**3 YEAR**  
WARRANTY  
**DIRECTOR 2**  
INCLUDING BATTERY



## **DIRECTOR 2** LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

A versatile exit luminaire designed for wall and ceiling mounting applications.

**LED**

# DIRECTOR 2 LED EXIT LIGHT

## COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

General purpose traditional interior exit luminaire, commercial building or retail.

### FEATURES

- Compliant to AS/NZS 2293
- Wall and ceiling mount
- Complete with replaceable Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery
- Manual test
- Maintained emergency exit
- All in one solution including all pictogram inserts
- Also available in DALI version
- 24m viewing distance
- 3 year warranty including battery

### BENEFITS

- Long LED life of 50,000 hours L70 provides low maintenance costs
- One box solution with a fully integrated assembly makes for easier installation
- Replaceable Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery

### SPECIFICATIONS

- Wattages: Maximum 4.6W
- Photometric Measurements: 48lm at 1W
- Voltage: 240V
- Ingress Protection: IP20 rated
- Maximum Ambient Temperature: Ta40°C
- LED Life: 50,000 hours L70
- Weight (Wall & Ceiling Mounted ): 1.3kg
- Dimension: Wall mount L380 x W110 x H160 (mm); Ceiling mount L380 x W160 x H220 (mm)
- Colour: White
- Battery Specification: LiFePO<sub>4</sub>, 1 cell 3.2V 1500mAh rechargeable battery pack
- Classification:
  - DIRLEDPSSL (Wall Mounted): C0:E1 C90/C270:E1.25 (2HR)
  - DIRLEDPDSL (Ceiling Mounted): C0/C180:D5 C90/C270:D6.3 (2HR)

### REPLACEMENT BATTERY


- BATPK1500/1L11: LiFePO<sub>4</sub>, 1 cell 3.2V 1500 mAh rechargeable battery pack

### APPLICATIONS


Ideal for emergency lighting general purpose interior exit luminaire, commercial building or retail.



DIRLEDPSSL (Wall Mount)

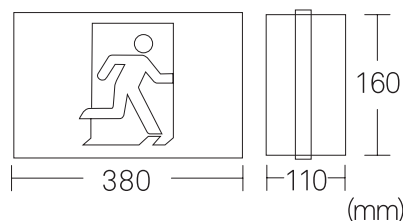

DIRLEDPDSL (Ceiling Mount)

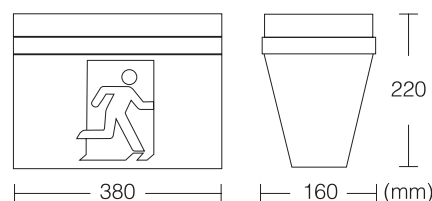

All pictogram inserts

# DIRECTOR 2 LED EXIT LIGHT

## COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

### DIRLEDPSSL - WALL MOUNT: AS/NZS2293.1:2018 CLASSIFICATION TABLE

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLANE (M)			
	C0	C90	C180	C270
2.1	3.7	4.1	0	4.1
2.4	0	4.1	0	4.1
2.7	0	0	0	0

### DIRLEDPDSL - CEILING MOUNT: AS/NZS2293.1:2018 CLASSIFICATION TABLE

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLANE (M)	
	C0/C180	C90/C270
2.1	7.8	8.5
2.4	8	8.8
2.7	8.1	8.9



DIRLEDPSSL



DIRLEDPDSL

PRODUCT CODE	DESCRIPTION	WATTAGE	DIMENSION (MM)	MASS (KG)
DIRLEDPSSL	Wall Mount	4.6W (Maximum)	L380 x W110 x H160	1.3
DIRLEDPDSL	Ceiling Mount	4.6W (Maximum)	L380 x W160 x H220	1.3

### ACCESSORIES

BATPK1500/1L11	LiFePO4 Battery, 1 Cell 3.2V 1500 mAh
----------------	---------------------------------------



\*Rated LED design life where stated is based upon application of PIERLITE's operating and maintenance guidelines; see [www.gerardlighting.com.au](http://www.gerardlighting.com.au)  
Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply.



Issue: November 2018