



DOT **9400SB**
SURFACE MOUNTED
BASE SERIES



DOT **9400S**
Series
120mm
sq. o/a
250mA-500mA

CREE CXA
CRI: ≥ 92
R_g Value: ≥ 72
MacAdam 2



TECHNICAL

Total Energy Consumption P_L(W) – Refer LED Performance Guide
 Weight 1360 gms
 IEC 60598 – parts 1 and 2 Complies
 AS/NZS60598 – parts 1 and 2 Complies
 Cyanosis (Australia only) 4000k option approved
 IP Rating Refer Accessory
 Silver Reflector – Wide angle beam
 Square Ceiling Plate (white) fitted to Downlight Body (white) as standard

STANDARD DIMMING OPTIONS AVAILABLE

D1 DALI (250mA–1400mA) **D5** one4all: switchDIM
D2 one4all: DSI DIM **D6** Push Dim (350mA–500mA)
D3 Analogue Dim 1-10V (350mA–500mA) **D7** one4all: DALI DIM
D4 Phase Cutting (350mA–500mA)


LED GUIDE – DOT 9400SB SURFACE MOUNTED BASE SERIES


DOT Model No.	Driver current (mA)	Colour Temp 3-3000k 4-4000k	Wattage (W)	Luminaire Output Lumens ^B	Luminaire efficacy (lm/W output)	Lifetime LED engine (Hrs @ L90/B10)
9428SB	(2) 250mA	3 A	10.0	768	76.8	$\geq 100,000$
9428SB	(2) 250mA	4 A	10.0	856	85.6	$\geq 100,000$
9438SB	(3) 350mA	3	14.2	1220	83.6	$\geq 100,000$
9438SB	(3) 350mA	4	14.0	1318	83.9	$\geq 100,000$
9458SB	(5) 500mA	3 A	21.0	1525	72.6	$\geq 100,000$
9458SB	(5) 500mA	4 A	21.0	1647	78.4	$\geq 100,000$

A Figures extrapolated / interpolated from data at other currents.

B Output Lumens : Delivered lumen output from downlight, including thermal, electrical and optic losses.

ORDERING CODE FORMAT

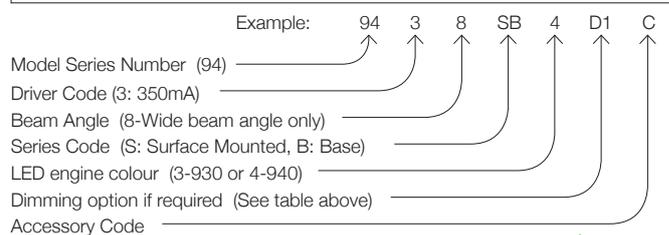




Accessories

AXLOCK ACCESSORIES
Fitted to downlight **after** installation

Accessory trims available
1 White **2** Black **3** Silver

Other colours available on request.

<p>Default (fitted as standard) Square Ceiling Plate IP20</p> <p>Moulded polycarbonate - 118mm square overall</p>	<p>C Square Clear Ceiling Lens IP54</p> <p>Moulded polycarbonate - 118mm square overall</p>
<p>DL Square Soft Diffusion Lens IP54</p> <p>Moulded polycarbonate - 118mm square overall</p>	<p>W Square Washlight Lens IP54</p> <p>5mm thick toughened glass with sandblasted centre. - 118mm square overall</p>
<p>FG Square Flush Glass IP54</p> <p>5mm thick toughened glass with sandblasted centre. - 120mm square overall</p>	



Photometric Data

9400SP PERFORMANCE SERIES

350 mA
CREE CXA
LED

