



MODERN & STYLISH QUICK CONNECT LED EXIT LUMINAIRE



STINGRAY 2 DALI LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

A modern quick connect exit light ideal for commercial interior applications.

STINGRAY 2 DALI LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

A stylish, quick connect DALI LED exit luminaire for interior exit sign application.

FEATURES

- Compliant to AS/NZS 2293
- Ceiling mount, with optional wall mount
- Complete with replaceable Lithium Iron Phosphate (LiFePO₄) battery
- Optional black 'theatre' body housing and picto inserts
- Optional IP65 KIT (Aqualock)
- DALI compliant
- Function test (10 sec) with test switch press
- Self-test if not connected to DALI network with 'health' status reported by bicolour LED indicator
- Maintained emergency exit
- All in one solution including all pictogram inserts
- Also available in standard version
- 24m viewing distance
- 4 year warranty including battery

BENEFITS

- Long LED life of 50,000 hours L70 provides low maintenance costs
- One box solution with a fully integrated assembly makes for easier installation
- Replaceable Lithium Iron Phosphate (LiFePO₄) battery

SPECIFICATIONS

- Wattages: Maximum 4.6W
- Photometric Measurements: 27lm at 1W
- Voltage: 240V
- Ingress Protection: IP20 rated & optional IP65 kit
- Maximum Ambient Temperature: Ta40°C
- LED Life: 50,000 hours L70
- Weight: 1.2kg
- Dimension: L395 x W81 x H245 (mm)
- Colour: White (Black option available)
- Battery Specification: LiFePO₄ Battery, 2 Cell 6.4V 1100 mAh
- Classification:
 - STLEDDA-L: C0/C180:D5 C90/C270:D8

OPTIONAL ACCESSORIES

- AQUALOCK-W: IP65 Kit
- Rod Suspension Kit
- Cantilever Bracket Wall Mount Kit

REPLACEMENT BATTERY

- BATPK110012L21: LiFePO₄ Battery, 2 Cell 6.4V 1100 mAh

APPLICATION

Ideal for emergency lighting, commercial and apartment buildings, retail, cinemas and halls.




STLEDDA-L



STTLEDDA-L



AQUA LOCK-W (IP65) with LED Stingray

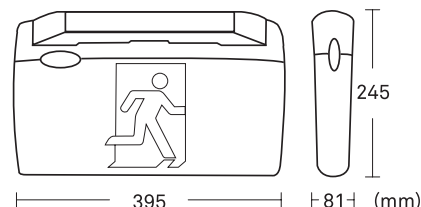

All pictogram inserts
STLEDDA-L (Standard)



All pictogram inserts
STTLEDDA-L (Theatre)

STINGRAY 2 DALI LED EXIT LIGHT

COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

STLEDDA-L (STANDARD):

AS/NZS2293.1:2018 CLASSIFICATION TABLE

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLANE (M)	
	C0/C180	C90/C270
2.1	7.8	9.4
2.4	8	9.7
2.7	8.1	9.9



STLEDDA-L

PRODUCT CODE	DESCRIPTION	WATTAGE	DIMENSION (MM)	MASS (KG)
STLEDDA-L	Standard STINGRAY2 DALI	4.6W (maximum)	L395 x W81 x H245	1.2
STTLEDDA-L	Theatre/Black STINGRAY2 DALI	4.6W (maximum)	L395 x W81 x H245	1.2

ACCESSORIES

BATPK1100/2L21	LiFePO4 Battery, 2 Cell 6.4V 1100 mAh
AQUALOCK-W	IP65 Enclosure
99023330	Rod Suspension Kit 1600mm white
EXCB	Cantilever Bracket Wall Mount Kit

240V

4.6W
MAXIMUM

ta40

50,000 HOURS
RATED AVERAGE DESIGN LIFE*

4
YEAR WARRANTY†
INCLUDING BATTERY

IP20 RATED

24m
VIEWING DISTANCE

DESIGNED & ASSEMBLED IN AUSTRALIA



*Rated LED design life where stated is based upon application of PIERLITE's operating and maintenance guidelines; see www.gerardlighting.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply.



Issue: November 2018