



**TRACK**  
SYSTEMS






# CILINDRO GEN 3


With a simple and sleek design the Cilindro Gen3 is the go-to product when looking for an economical track spot that delivers precision, performance, and practicality.

- The slimline design features either a 60mm, 80mm, or 90mm diameter barrel.
  - The non dimmable driver is integral with no visible screws anywhere on the body of the luminaire
  - The 3 power options of 17W, 32W, and 54W provide a range of lumen outputs from 1500lms and up to 5250lms, to suit all your applications
  - Each track spot is complete with 3 precise high quality lens options. Choose between: 24° Narrow, 36° Medium, and 54° Wide
- High colour rendering index CRI>90 with high colour consistency SDCM3
  - The Cilindro barrel is adjustable up to 90° with 355° rotation
  - 3000K & 4000K Colour temperature options
  - Available in white RAL9016 or black RAL9005 housing colour
  - Global 3 circuit track adaptor GA69 suitable for most universal 3 circuit tracks

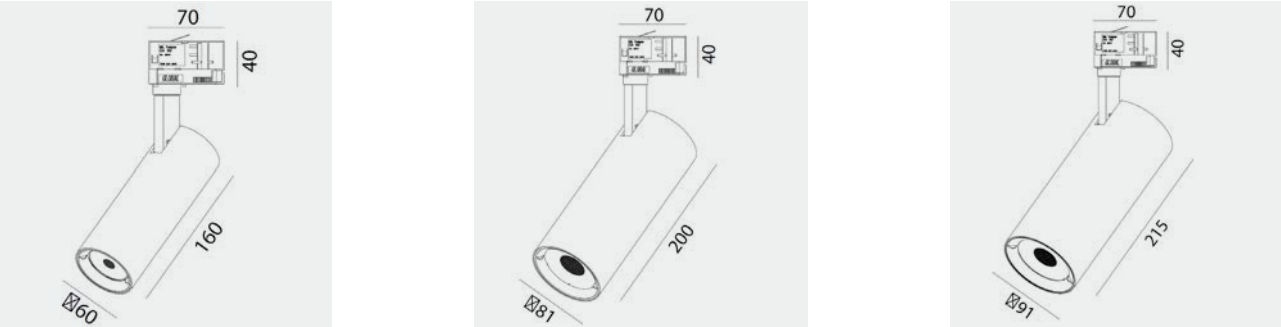


CODE	DESCRIPTION	SYSTEM POWER (W)	FINISH	COLOUR TEMP	CRI	BEAM ANGLE	FIXTURE LUMEN (LM)	FIXTURE EFFICACY (LM/W)
CI60173WG3	CILINDRO GEN3 60	17	White	3000K	90	36°(24°-54°)	1496	88
CI60173BG3	CILINDRO GEN3 60	17	Black	3000K	90	36°(24°-54°)	1496	88
CI80323WG3	CILINDRO GEN3 80	32	White	3000K	90	36°(24°-54°)	2835	89
CI80323BG3	CILINDRO GEN3 80	32	Black	3000K	90	36°(24°-54°)	2835	89
CI90543WG3	CILINDRO GEN3 90	54	White	3000K	90	36°(24°-54°)	4725	88
CI90543BG3	CILINDRO GEN3 90	54	Black	3000K	90	36°(24°-54°)	4725	88
CI60174WG3	CILINDRO GEN3 60	17	White	4000K	90	36°(24°-54°)	1615	95
CI60174BG3	CILINDRO GEN3 60	17	Black	4000K	90	36°(24°-54°)	1615	95
CI80324WG3	CILINDRO GEN3 80	32	White	4000K	90	36°(24°-54°)	3024	95
CI80324BG3	CILINDRO GEN3 80	32	Black	4000K	90	36°(24°-54°)	3024	95
CI90544WG3	CILINDRO GEN3 90	54	White	4000K	90	36°(24°-54°)	5250	97
CI90544BG3	CILINDRO GEN3 90	54	Black	4000K	90	36°(24°-54°)	5250	97


## Cilindro Gen3 60



SMALL - 24°




MEDIUM - 36°




LARGE - 54°


## Cilindro Gen3 80



SMALL - 24°




MEDIUM - 36°




LARGE - 54°


## Cilindro Gen3 90



SMALL - 24°



MEDIUM - 36°





LARGE - 54°





# PIERLITE TRACK SPOTS


## UNIVERSAL 3 CIRCUIT

CILINDRO II 95 DALI - 3 CIRCUIT TRACK SPOT WITH INTEGRAL DALI DRIVER		
	CI095390135D	Cilindro II 95 DALI 35W 3000K 24° CRI90 White 2950lm
	CI095490135D	Cilindro II 95 DALI 35W 4000K 24° CRI90 White 3050lm
	CI095390235D	Cilindro II 95 DALI 35W 3000K 24° CRI90 Black 2950lm
	CI095490235D	Cilindro II 95 DALI 35W 4000K 24° CRI90 Black 3050lm

SWITCHBLADE - 3 CIRCUIT ADJUSTABLE/ROTATIONAL TRACK SPOT NON DIM		
	SB763370241A	Switchblade Non Dim 25W 3000K 24° CRI90 White 1912lm
	SB763470241A	Switchblade Non Dim 25W 4000K 24° CRI90 White 2012lm
	SB763370242A	Switchblade Non Dim 25W 3000K 24° CRI90 Black 1912lm
	SB763470242A	Switchblade Non Dim 25W 3000K 24° CRI90 Black 2012lm

SWITCHBLADE VARIABLE FOCUS- 3 CIRCUIT BEAM ADJUSTABLE TRACK SPOT NON DIM		
	SB763370VA1A	Switchblade Non Dim 25W 3000K Variable Focus 25°-60° CRI90 White
	SB763370VA2A	Switchblade Non Dim 25W 3000K Variable Focus 25°-60° CRI90 Black
	SB763470VA1A	Switchblade Non Dim 25W 4000K Variable Focus 25°-60° CRI90 White
	SB763470VA2A	Switchblade Non Dim 25W 4000K Variable Focus 25°-60° CRI90 Black

MURA WALL WASHER - 3 CIRCUIT ADJUSTABLE TRACK SPOT NON DIM		
	MU300385601	Mura Wall Washer Non Dim 30W 3000K 60° CRI90 White 3000lm
	MU300385602	Mura Wall Washer Non Dim 30W 3000K 60° CRI90 Black 3000lm

KIMBAL SPOTLIGHT - 3 CIRCUIT TRACK SPOT AND SURFACE MOUNT	
	Available in a variety of dimming options:
	<ul style="list-style-type: none"><li>• Trackspot - Non-Dim, DALI, and Casambi</li><li>• Surface mount – Non-Dim, Analogue, Phase, and Push dim</li><li>• Track spots ranging from 10W to 40W, 1300lm to 5000lm</li><li>• Surface mount ranging from 10W to 27W, 1300lm to 3500lm</li><li>• Colour temp: 3000K/3500K/4000K; beam distribution: 30°, 55°, 70°, and 100°</li><li>• CRI80 &amp; CRI90 options. White, black and silver trim finishes</li></ul>

For further information on Pierlite trackspots visit [pierlite.com.au/products/interior](http://pierlite.com.au/products/interior)

# EUROPEAN TRACK SPOTS

## UNIVERSAL 3 CIRCUIT

### Concord

One of Europe’s most respected architectural lighting brands, renowned for its strong design ethics, high technical performance and aesthetic form. The Concord lighting range delivers creative LED solutions for any application. Find out more: [pierlite.com.au/concord](http://pierlite.com.au/concord)



BEACON LED  
TUNEABLE WHITE - DALI



LENZO  
VARIABLE BEAM



TIDE  
LINEAR ASYMMETRIC



PIXO MINI  
MINIMALIST



Made in Italy since 1982, the SIDE range is a distinguished and recognised market leader, offering high-end, internal luminaires with bespoke solutions in architectural lighting. Find out more: [pierlite.com.au/side](http://pierlite.com.au/side)



SHORT  
COMPACT



BIG RAIL  
DECORATIVE DIFFUSED



ROSS  
WIDE DISTRIBUTION



VEGA  
HIGH OUTPUT



A member company of the Disano Group, Fosnova was founded in Italy in 1975. Producing specialised indoor lighting luminaires with a refined aesthetic, in collaboration with designers of international fame. Find out more: [pierlite.com.au/fosnova](http://pierlite.com.au/fosnova)



RIO 'B'  
ACCENT LIGHTING



VISION 2.0  
ROD SUSPENSION



MATRIX Q5 DARK 'C'  
ARCHITECTONIC



LISET 2.0 HE  
LINEAR UGR<19 - DALI




# IVELA 3 CIRCUIT TRACK SYSTEM

- Black and white finish as standard; silver upon request
  - Available in 1.0, 2.0, 3.0 & 4.0 metre lengths
  - Installation – surface mount, suspended or recessed
  - Polarised 16A three circuit track system with a common neutral ie. L1+N, L2+N, L3+N
  - Compatible with Concord, Global and other European three circuit track adaptors
  - Couplers and feeds are pre-wired and polarised for ease of installation
- Total load of 16A on a 240V mains connection
  - Maximum of 3840W can be divided among the 3 circuits
  - Track load capacity of 2kg every 200mm with a maximum distance of 800mm between the fixing points
  - For a 10kg load every 200mm, a maximum fixing distance of 400mm is recommended
  - Track can be used as a single circuit system with DALI connection. The luminaires wiring instructions must be followed


## IVELA TRACK CONFIGURATION

For correct installation of all accessories in a three-phase track composition, the earth conductors of each component must be positioned consistently.


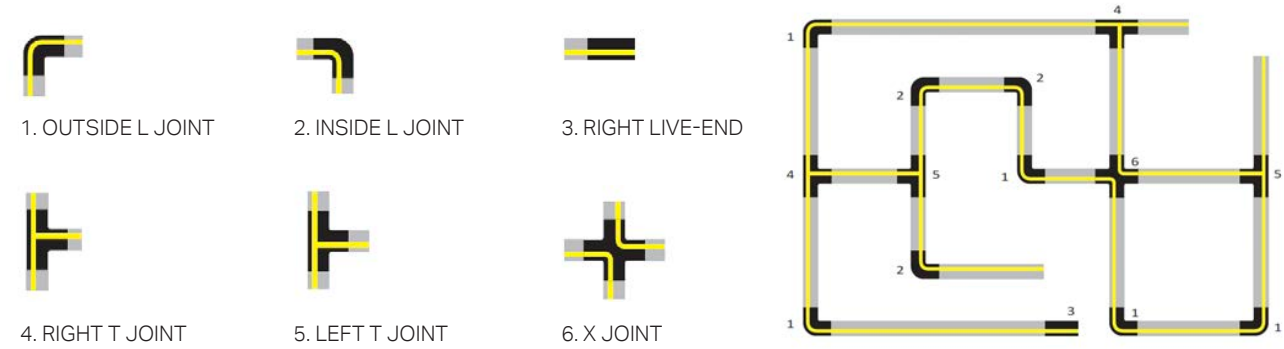













## SURFACE AND RECESSED TRACKS

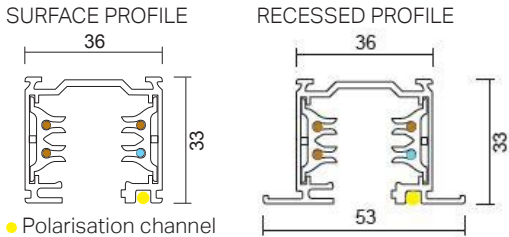SURFACE MOUNT	CODE (WHITE)	CODE (BLACK)	RECESSED	CODE (WHITE)	CODE (BLACK)
3CT track surface 1m	IV-7511-10-31	IV-7511-10-30	3CT track recessed 1m	IV-7512-10-31	IV-7512-10-30
3CT track surface 2m	IV-7511-20-31	IV-7511-20-30	3CT track recessed 2m	IV-7512-20-31	IV-7512-20-30
3CT track surface 3m	IV-7511-30-31	IV-7511-30-30	3CT track recessed 3m	IV-7512-30-31	IV-7512-30-30
3CT track surface 4m	IV-7511-40-31	IV-7511-40-30	3CT track recessed 4m	IV-7512-40-31	IV-7512-40-30



## TRACK ACCESSORIES

SURFACE AND SUSPENDED	CODE (WHITE)	CODE (BLACK)
 3CT elec straight joint (coupler)	IV-7604-10-W31	IV-7604-10-W30
 3CT right live end	IV-7652-10-W31	IV-7652-10-W30
 3CT left live end	IV-7652-11-W31	IV-7652-11-W30
 3CT inside L-joint	IV-7655-10-W31	IV-7655-10-W30
 3CT outside L-joint	IV-7655-11-W31	IV-7655-11-W30
 3CT right T joint	IV-7656-10-W31	IV-7656-10-W30
 3CT left T joint	IV-7656-11-W31	IV-7656-11-W30
 3CT X-joint	IV-7657-10-W31	IV-7657-10-W30
 3CT end cap	IV-7659-00-W31	IV-7659-00-W30
 3CT adjustable coupler	IV-7660-00-W31	IV-7660-10-W30
 3CT suspension kit 2m with white canopy	IV-7606-00-31	IV-7606-00-30
 3CT suspension kit 5m with white canopy and locking device	IV-7606-07-31	IV-7606-07-30
 3CT suspension kit 5m complete with 60mm ceiling barrel	IV-7606-095-11 (silver)	

### RECESSED

 3CT right live end recessed	IV-7662-10-W31	IV-7662-10-W30
 3CT left live end recessed	IV-7662-11-W31	IV-7662-11-W30
 3CT end cap	IV-7659I-00-W31	IV-7659I-00-W30
 3CT suspension for false ceiling	N/A	IV-7664-00-48
 3CT elec straight joint (coupler)	IV-7604-10-W31	IV-7604-10-W30

For more detailed information on Ivela track and components visit: [pierlite.com.au/products/interior/ivela-3ct-track-surface](http://pierlite.com.au/products/interior/ivela-3ct-track-surface)



## **NEW SOUTH WALES**

### **NATIONAL HEAD OFFICE**

Phone: **1300 799 300** | Fax: **1300 789 300**  
**96-112 Gow Street, Padstow NSW 2211**  
Postal Address: **PO BOX 314 Padstow NSW 2211**

## **QUEENSLAND**

Phone: **1300 799 300** | Fax: **1300 789 300**  
**54 Berwick Street, Fortitude Valley QLD 4006**  
Postal Address: **PO Box 500 Fortitude Valley QLD 4006**

## **VICTORIA/TASMANIA**

Phone: **1300 799 300** | Fax: **1300 789 300**  
**Unit 2, 20 Sabre Drive, Port Melbourne VIC 3207**

## **SOUTH AUSTRALIA/NORTHERN TERRITORY**

Phone: **1300 799 300** | Fax: **1300 789 300**  
**Level 2, 191 Fullarton Rd, Dulwich SA 5065**

## **WESTERN AUSTRALIA**

Phone: **1300 799 300** | Fax: **1300 789 300**  
**77 Truganina Road, Malaga WA 6090**  
Postal Address: **PO Box 2046 Malaga, WA 6944**



**1300 799 300 | PIERLITE.COM.AU**



Pierlite is a registered trademark of Gerard Lighting Pty Ltd ©Copyright Pierlite 2020. Gerard Lighting Pty Ltd and all directly related legal entities reserve the right to alter the specifications, designs or other features of any items herein and to discontinue any items at any time without notice and without liability.