


807 Wallwasher LED

Housing: made of sheet steel. Reflector: low luminance anti-iridescence matt aluminium. Coating: housing and reflector acrylic anionic electrocoating, UV-stabilized. Equipment: supplied with 1.5m cable. Supplied without brackets: when not contact mounted, use brackets acc. 900. Luminous flux maintenance 80% 50.000h (L80B20) Photobiological safety class: exempt group.

Download

DXF 2D
- 807v.dxf

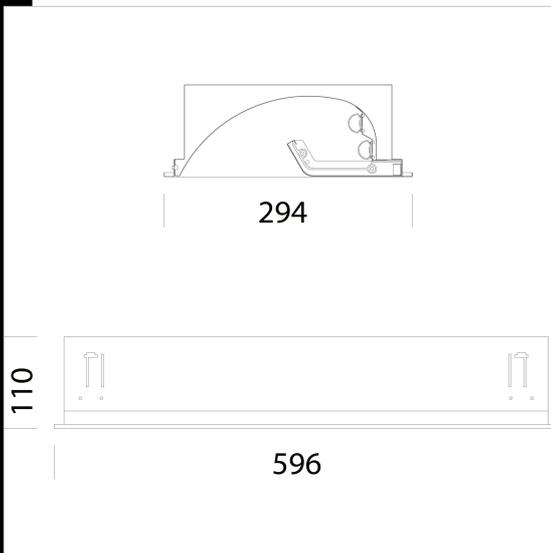

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
153126-00	CLD CELL	3.37	LED-1370lm-4000K-CRI>80	28 W	BIANCO

Accessories



- 900 adjustable bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated