

DOT Downlights INSTALLATION INSTRUCTIONS




DOT 9100S Series – Surface Mounted Downlights DOT 9700S Series – Surface Mounted Downlights DOT 9900S Series – Surface Mounted Downlights

IP 20 CE


DESIGNED & CONSTRUCTED IN NEW ZEALAND

Complies with IEC60598
Complies with AS/NZS60598
RoHS compliant


– Supply voltage 220-240V 50 HZ – Suitable for indoor use only – Min. distance from building element = 0.1M

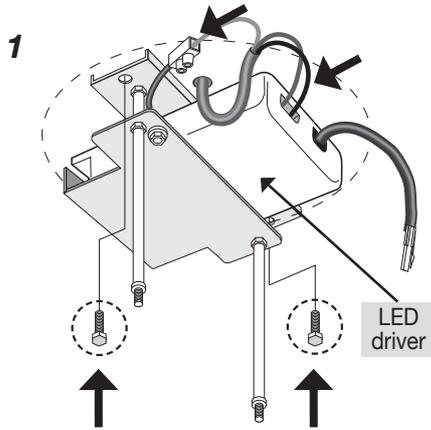

- Fix bracket assembly to mounting surface
- Connect mains cable to driver and connect earth

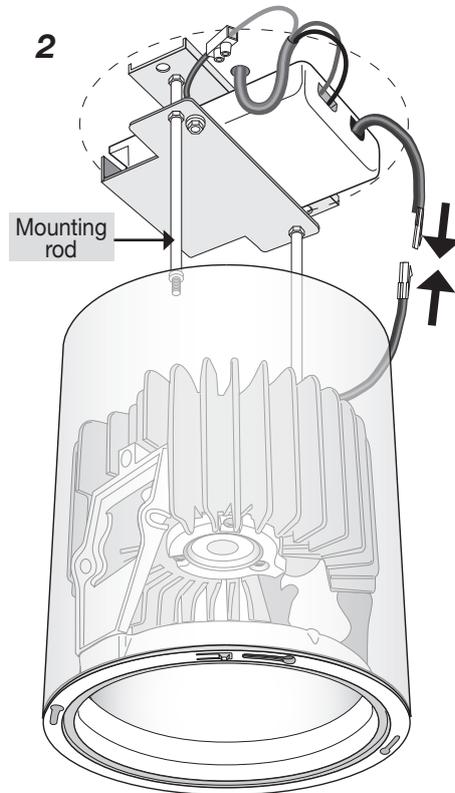


- Connect downlight cable to driver secondary cable
- Insert mounting rods between heat sink fins closest to downlight legs

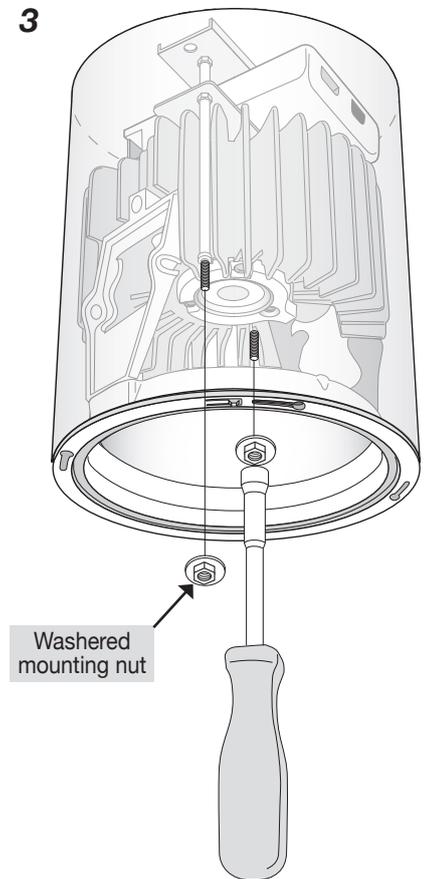

- Secure luminaire with washered mounting nuts (tool supplied).
Caution – do not over tighten



- Replace reflector
- Replace AXLock Ceiling Plate / Accessory

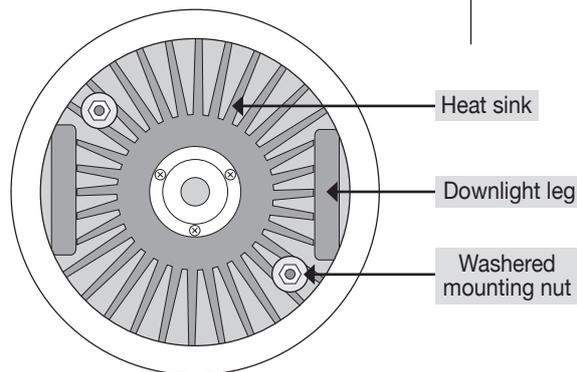

AXLock Accessories – Installation

