

DOT Downlights INSTALLATION INSTRUCTIONS




DOT 9400S & 9800S Series Surface Mounted Downlights


IP 20 CE

Complies with IEC60598
Complies with AS/NZS60598
RoHS compliant


- Supply voltage 220-240V 50 HZ - Suitable for indoor use only - Min. distance from building element = 0.1M

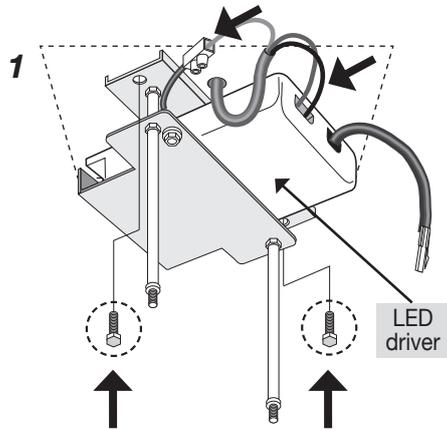



- Fix bracket assembly to mounting surface
- Connect mains cable to driver and connect earth

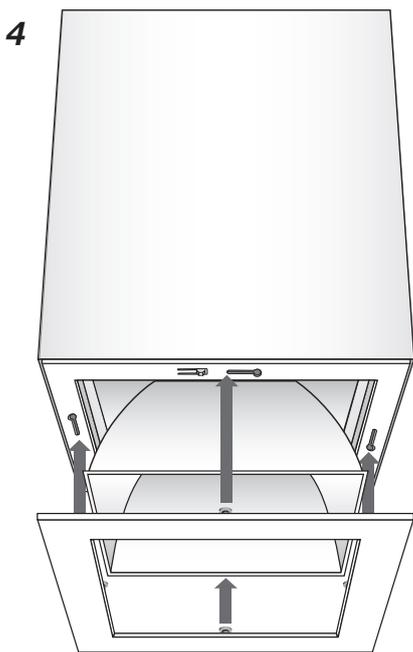

- Replace reflector
- Replace AXLock Ceiling Plate / Accessory

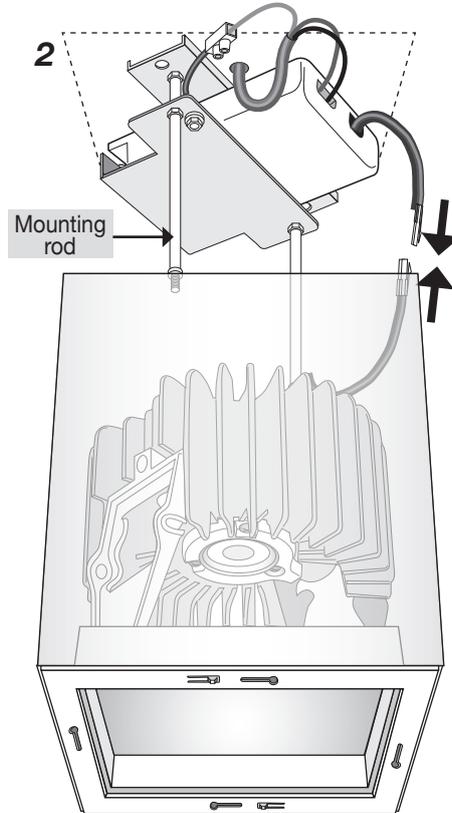

- Connect downlight cable to driver secondary cable
- Insert mounting rods between heat sink fins closest to downlight legs

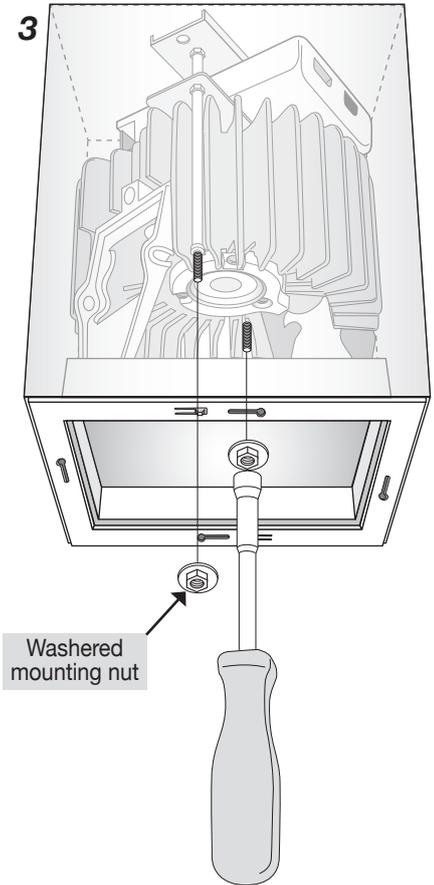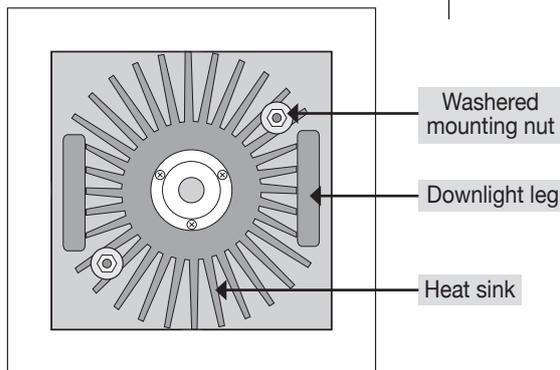

- Secure luminaire with washered mounting nuts (tool supplied).
Caution - do not over tighten

AXLock Accessories - Installation

