


IVELA 3 CIRCUIT TRACK SYSTEM

- Black and white finish as standard; silver upon request
- Available in 1.0, 2.0, 3.0 & 4.0 metre lengths
- Installation – surface mount, suspended or recessed
- Polarised 16A three circuit track system with a common neutral ie. L1+N, L2+N, L3+N
- Compatible with Concord, Global and other European three circuit track adaptors
- Couplers and feeds are pre-wired and polarised for ease of installation
- Total load of 16A on a 240V mains connection
- Maximum of 3840W can be divided among the 3 circuits
- Track load capacity of 2kg every 200mm with a maximum distance of 800mm between the fixing points
- For a 10kg load every 200mm, a maximum fixing distance of 400mm is recommended
- Track can be used as a single circuit system with DALI connection. The luminaires wiring instructions must be followed


IVELA TRACK CONFIGURATION

For correct installation of all accessories in a three-phase track composition, the earth conductors of each component must be positioned consistently.

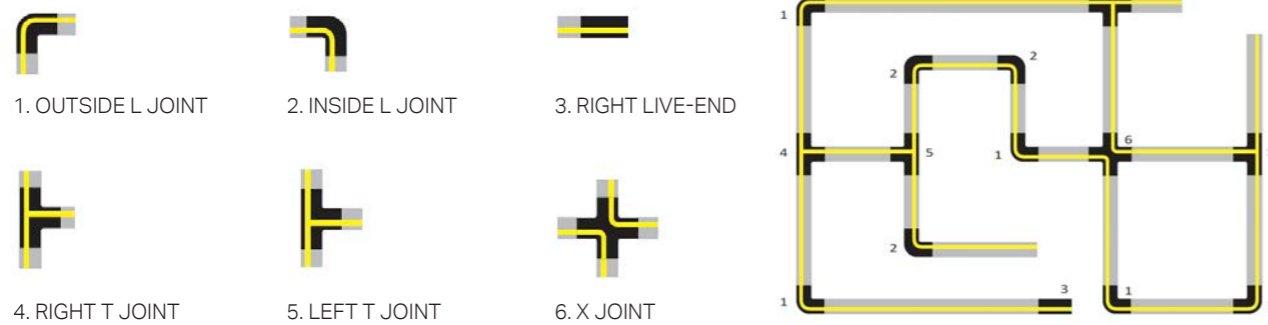

SURFACE AND RECESSED TRACKS

SURFACE MOUNT	CODE (WHITE)	CODE (BLACK)	RECESSED	CODE (WHITE)	CODE (BLACK)
3CT track surface 1m	IV-7511-10-31	IV-7511-10-30	3CT track recessed 1m	IV-7512-10-31	IV-7512-10-30
3CT track surface 2m	IV-7511-20-31	IV-7511-20-30	3CT track recessed 2m	IV-7512-20-31	IV-7512-20-30
3CT track surface 3m	IV-7511-30-31	IV-7511-30-30	3CT track recessed 3m	IV-7512-30-31	IV-7512-30-30
3CT track surface 4m	IV-7511-40-31	IV-7511-40-30	3CT track recessed 4m	IV-7512-40-31	IV-7512-40-30

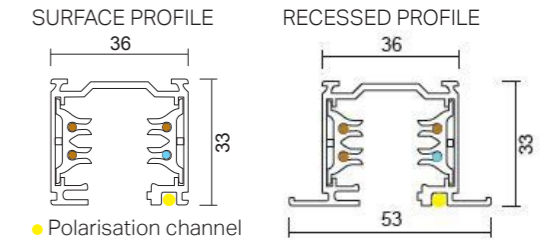

TRACK ACCESSORIES

SURFACE AND SUSPENDED	CODE (WHITE)	CODE (BLACK)
3CT elec straight joint (coupler)	IV-7604-10-W31	IV-7604-10-W30
3CT right live end	IV-7652-10-W31	IV-7652-10-W30
3CT left live end	IV-7652-11-W31	IV-7652-11-W30
3CT inside L-joint	IV-7655-10-W31	IV-7655-10-W30
3CT outside L-joint	IV-7655-11-W31	IV-7655-11-W30
3CT right T joint	IV-7656-10-W31	IV-7656-10-W30
3CT left T joint	IV-7656-11-W31	IV-7656-11-W30
3CT X-joint	IV-7657-10-W31	IV-7657-10-W30
3CT end cap	IV-7659-00-W31	IV-7659-00-W30
3CT adjustable coupler	IV-7660-00-W31	IV-7660-10-W30
3CT suspension kit 2m with white canopy	IV-7606-00-31	IV-7606-00-30
3CT suspension kit 5m with white canopy and locking device	IV-7606-07-31	IV-7606-07-30
3CT suspension kit 5m complete with 60mm ceiling barrel	IV-7606-095-11 (silver)	

RECESSED

3CT right live end recessed	IV-7662-10-W31	IV-7662-10-W30
3CT left live end recessed	IV-7662-11-W31	IV-7662-11-W30
3CT end cap	IV-7659I-00-W31	IV-7659I-00-W30
3CT suspension for false ceiling	N/A	IV-7664-00-48
3CT elec straight joint (coupler)	IV-7604-10-W31	IV-7604-10-W30

For more detailed information on Ivela track and components visit: pierlite.com.au/products/interior/ivela-3ct-track-surface