

# Centrina LED

Cost effective, wall mounted bulkhead using energy efficient LEDs.

## Specification

- Total power of only 23W providing a low energy lighting solution
- LED technology with integral driver offer 30,000 hours life\* and low maintenance
- Hinged prismatic lens with diffuser for optimised downward asymmetric distribution
- Robust polycarbonate lens and die-cast aluminium body
- Easy to install with multiple 20mm cable entry options
- Integral seal offers IP65 weather protection
- Suitable for ambient temperatures up to 40C

### SENSOR VERSION:

- Concealed automatic built in motion sensor
- Automatically turns off when there are no occupants
- Adjustable time-out period and sensitivity

## Product Codes

Code	Version	Dim (mm)	Mass (kg)
CENT23WLED	23W LED 6100K	260 x 300 x 180	1.8
CENT23WLEDS	23W LED 6100K Incl. Sensor	260 x 300 x 180	1.9



## Quick Specification

Pierlite Centrina LED (or LED SENSOR), 23W LED, integral driver, die-cast aluminium body with hinged polycarbonate prismatic lens, IP65 protection

## Design Application


Ideal for security lighting around schools, hospitals, public buildings and industrial sites

## Performance

### Centrina CENT23WLED 1xLED/865

L.O.R.= 1.00 1 x 713 lm


Polar intensity diagram

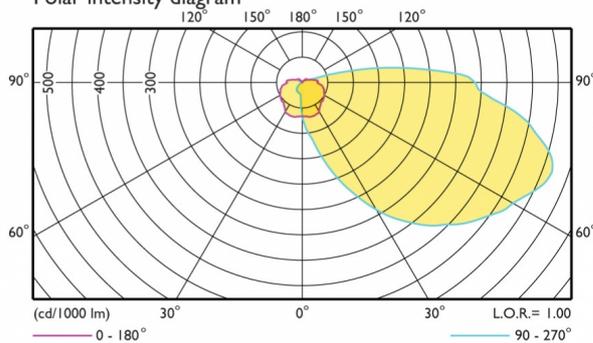

Horizontal Illuminance  $\leq 0^\circ$

H (m)	E <sub>max</sub> (lux)
2.0	33
3.0	15
4.0	8

M.F.= 1.0



IP65



Max Dim (mm)  
260 x 300 x 180



PDF Prepared: 20.01.2017 12:01pm, Last page update: Apr 2014



**PIERLITE**  
professional lighting solutions